

# ASUS PA329C




EAN:  
4718017210225

Produkt Nummer:  
90LM02CC-B02370

## Highlights

- 81,28cm (32 Zoll) 4K-IPS-Monitor mit einem beeindruckenden Kontrastverhältnis von 100.000.000:1 und hohem Betrachtungswinkel von 178°
- VESA-DisplayHDR-600-zertifiziert HDR-10 für eine naturgetreue Bildarstellung
- Die Technologie für eine außergewöhnliche breite Farbraumdarstellung bietet 98% DCI-P3, 100% Adobe RGB, 100% sRGB und 84% Rec. 2020, Farbraum, ab Werk vorkalibriert für eine hervorragende Farbtreue von ?E
- ASUS ProArt™-Kalibrierungstechnologie bietet eine 14-Bit Look-Up-Tabelle (LUT), Uniformitätskompensation und die Möglichkeit, Farbprofile auf dem Monitor zu speichern
- E/A-Schnittstellen: DP über USB-C mit 60W-Stromversorgung, DisplayPort, HDMI und USB-3.0-Hub

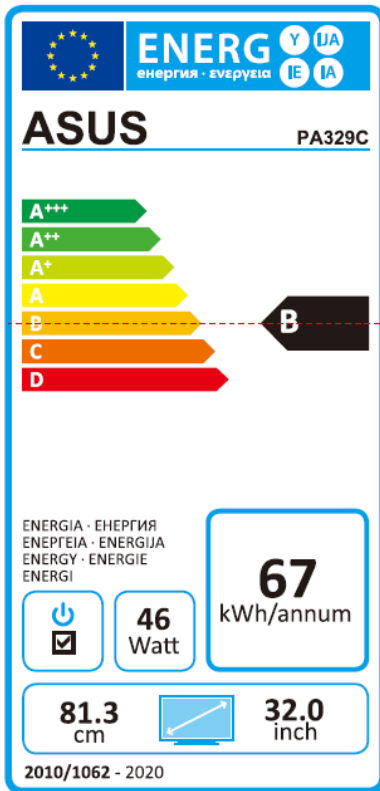

## Spezifikationen

**Display** Panel Size: Wide Screen 32" (81.28cm) 16:9  
Color Saturation : 98% DCI-P3, 100% Adobe RGB, 100% sRGB and 84% Rec.2020  
Panel Backlight / Type : In-Plane Switching  
True Resolution : 3840x2160  
Display Viewing Area(HxV) : 708.48 x 398.52 mm  
Display Surface : Non-glare  
Pixel Pitch : 0.1845 mm  
Brightness : 400 cd/? (Typical)/600 cd/? (Peak)  
Contrast Ratio : 1000 :1 (Typical)/1000000 :1 (HDR)  
Viewing Angle (CR?10) : 178°(H)/178°(V)  
Response Time : 5ms (Gray to Gray)  
Display Colors : 1073.7M (10bit)  
Flicker free  
LCD ZBD Warranty : Yes  
Look-up Table :14-bit  
DICOM Calibration : Yes  
HDR (High Dynamic Range) Support : Yes (HDR-10)

**Video Feature** ProArt Preset : 9 Modes(Adobe RGB Mode/DCI-P3/DICOM/HDR\_PQ Rec2020/sRGB Mode/Rec. 709 Mode/Standard Mode/User Mode 1/User Mode 2)  
Color Temperature Selection : 4 Modes  
Color Accuracy : ?E< 2  
Gamma adjustment : Yes (Support Gamma 1.8/2.0/2.2/2.4/2.6 )  
Color Adjustment : 6-axis adjustment(R,G,B,C,M,Y)  
QuickFit (modes) : Yes (Alignment Grid/Paper/Ruler/Customization Modes)  
Picture-in-Picture : Yes  
Picture-by-Picture : Yes (support up to 4 UHD windows)  
Low Blue Light : Yes  
HDCP support : Yes, 1.4 & 2.2

**Audio Features** Stereo Speakers : 3W x 2 Stereo RMS

**I/O Ports** Signal Input : HDMI(v2.0) x3, DisplayPort 1.2, USB Type-C

Earphone jack : 3.5mm Mini-Jack  
USB upstream : USB3.0 Type-C x1  
USB downstream : USB3.0 Type-A x5

**Signal Frequency** Digital Signal Frequency : 30 ~135 KHz (H) /24 ~76 Hz(V)

**Power Consumption** Power On: <56.84W\*  
Power Saving: <0.5W  
Power Off: 0W  
Voltage: 100-240V, 50/60Hz

**Mechanical Design** Chassis Colors : Black  
Tilt : +20°~-5°  
Swivel : +45°~-45°  
Pivot : 0°~+90°  
Height Adjustment : 0~130 mm  
VESA Wall Mounting : 100x100mm  
Quick Release Stand Design : Yes

**Security** Kensington lock

**Dimensions** Phys. Dimension with Stand (WxHxD) : 735 x 615 x 240 mm  
Phys. Dimension without Stand (WxHxD) : 734.4 x 431 x 66.85 mm  
Box Dimension (WxHxD) : 847 x 552 x 350 mm

**Weight** Net Weight (Esti.) : 12.32 kg,  
Without Stand: 8.7 Kg,  
Gross Weight (Esti.) : 16.7 kg

**Accessories** Power cord  
DisplayPort cable (Optional)  
USB-C cable (Optional)  
USB-C to A cable  
Quick start guide  
HDMI cable (Optional)  
Warranty Card  
Color pre-calibration report

**Compliance and Standards** Energy Star®, BSMI, CB, CCC, CE, C-Tick, CU, ErP, FCC, ISO-9241-307, J-MOSS, Mac Compliance, PSE, RoHS, TUV-GS, UL/cUL, VCCI, WEEE, WHQL (Wind  
Flicker-free , KC , eStandby, TUV Low Blue Light, MSIP(KCC)

**Note** \* measuring a screen brightness of 200 nits without audio/ USB/ Card reader connection  
All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets.