


Overview

HPE ProLiant ML110 Gen11

Provide enhanced single processor and storage flexibility in a 4.5U 1P tower optimized server with optional rackable chassis, outstanding compute performance, security, reliability, and expandability at an affordable price. Fill a mid-range of workloads for small offices, remote and branch offices of large enterprises, growing SMBs and data centers with the power of 4th Gen Intel® Xeon® Scalable Processors (up to 32 cores) increased bandwidth with DDR5 and PCIe Gen5. HPE ProLiant ML110 Gen11 server is an excellent choice to accelerate your growing business.

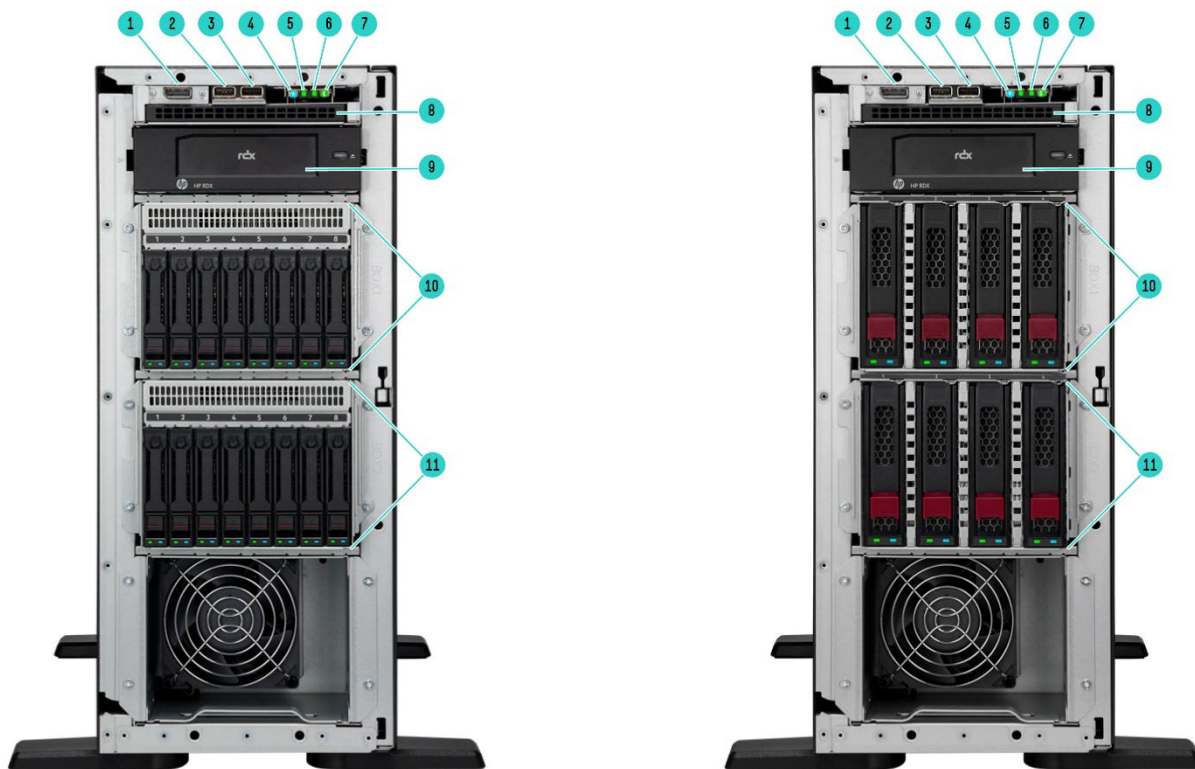


Front View – SFF chassis with optional Gen11 16 SFF and 8LFF Drive Cage Kits with RDX shown (Tower mode)

- | | | | |
|----|-------------------|-----|--|
| 1. | DisplayPort 1.1a | 7. | Power on/Standby button and system power LED |
| 2. | USB 3.2 Gen1 port | 8. | Optical drive bay |
| 3. | iLO service port | 9. | Media Bay: optional internal USB RDX docking station |
| 4. | UID button/LED | 10. | Box1: 4LFF/NHP or 8SFF SAS/SATA drive cage |
| 5. | NIC status LED | 11. | Box2: Optional 4LFF/NHP or 8SFF SAS/SATA drive cage |
| 6. | Health LED | | |

Notes: Image shown without the security front bezel which is standard in every ML110 Gen11 unit.

Overview

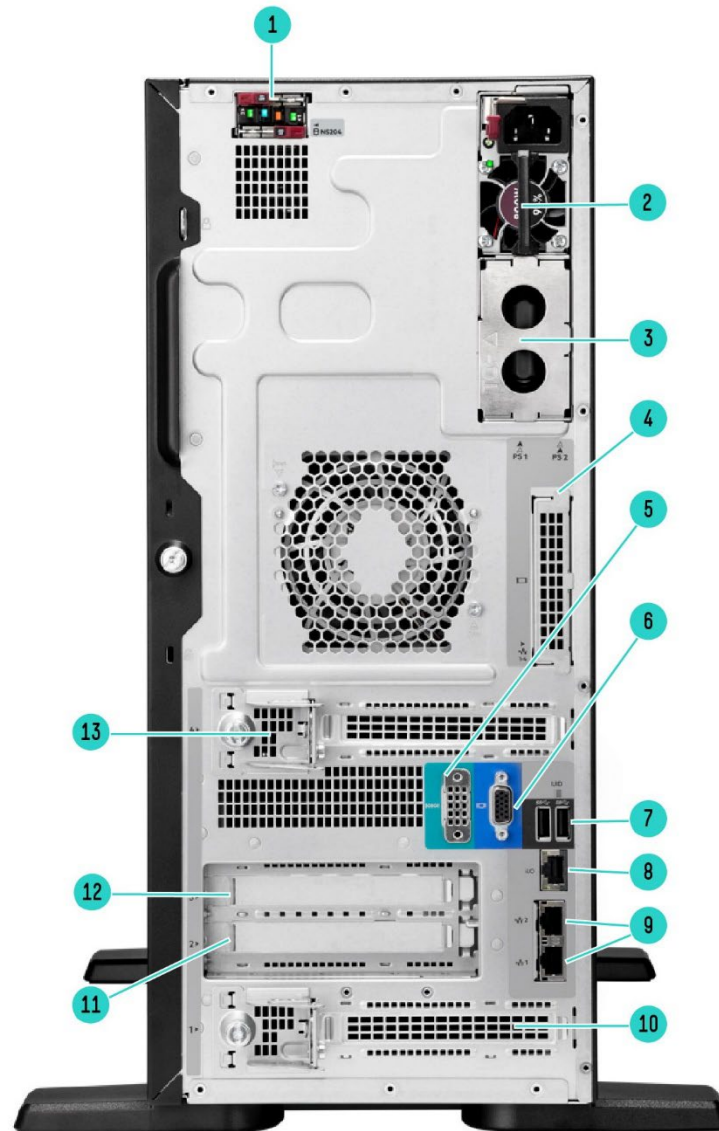


Rear View – With optional NS204i-u and riser kit shown.

- | | |
|--|--|
| 1. HPE NS204i-u Gen11 NVMe Hot Plug Boot Device (Optional) | 8. iLO management port |
| 2. Flexible Slot power supply 1 | 9. Dual NIC ports (1 GbE) |
| 3. Flexible Slot power supply 2 | 10. Slot 1 PCIe5 x16 |
| 4. Slot 14 OCP 1 (Optional for OROC/NIC OCP adapter) | 11. Slot 2 PCIe5 x16 (Optional riser kit required) |
| 5. Serial port (Optional) | 12. Slot 3 PCIe5 x16 (Optional riser kit required) |
| 6. VGA Port | 13. Slot 4 PCIe5 x16 |
| 7. Dual USB 3.2 Gen 1 ports | |



Overview

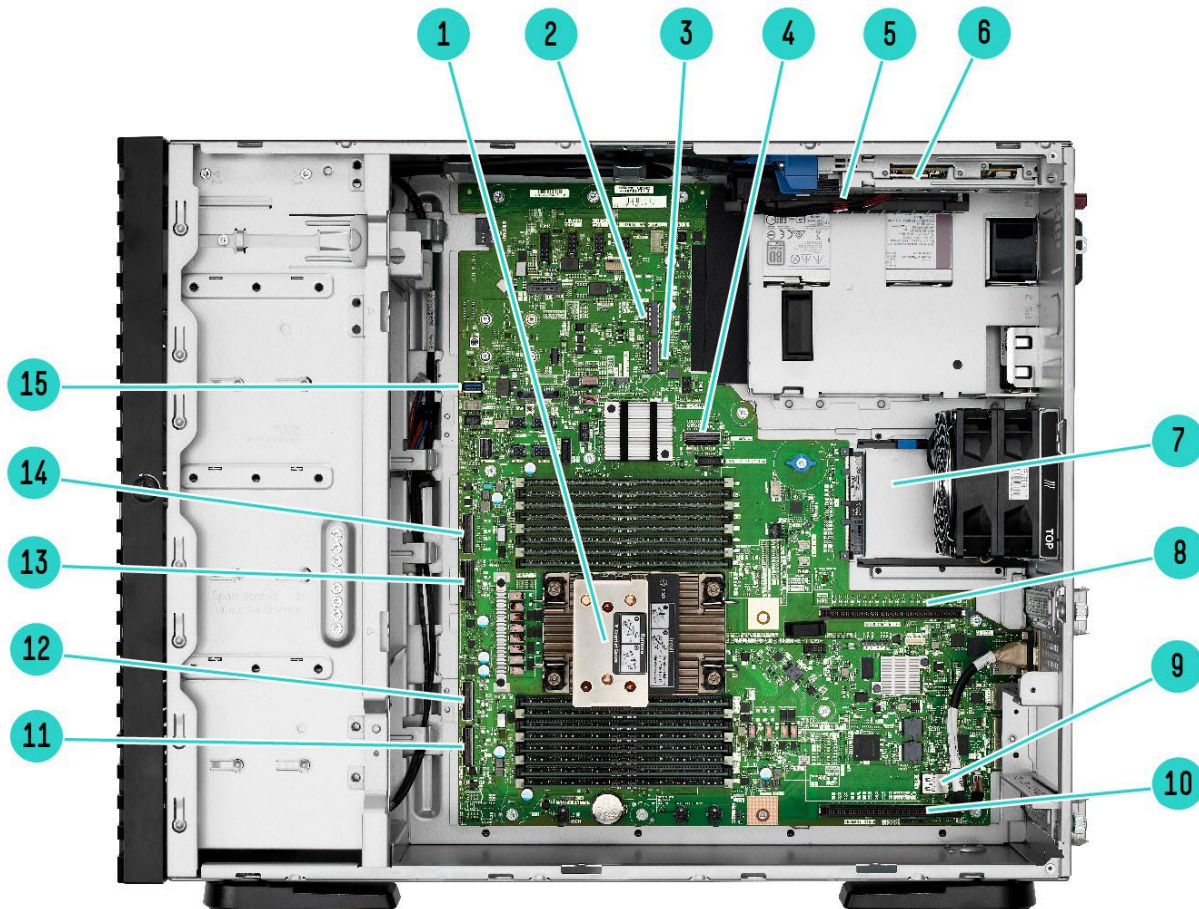

Internal View – with full memory DIMM populated and optional NS204i-u shown

- | | |
|--|--------------------------------------|
| 1. CPU Socket with 16 DDR5 DIMM slots | 9. USB 2.0 port |
| 2. M.2 Slot 2 | 10. Slot 1 PCIe5 x16 |
| 3. M.2 Slot 1 | 11. MCIO port 1 for the riser slot 2 |
| 4. x8 SlimSAS port | 12. MCIO port 2 for the riser slot 2 |
| 5. Megacell battery holder (Under) | 13. MCIO port 3 for the riser slot 3 |
| 6. HPE NS204i-u NVMe Hot Plug Boot Device (Optional) | 14. MCIO port 4 for the riser slot 3 |
| 7. Slot 14 OCP 1 (Optional for OROC/NIC) | 15. USB 3.2 Gen 1 port |
| 8. Slot 4 PCIe5 x16 | |



Overview

What's New

- Powered by 4th Generation Intel® Xeon® Scalable processors that support up to 32 core at 185W, 60 MB of L3 Cache, and 16 DIMMs for DDR5 memory up to 4800 MT/s.
- Increased memory bandwidth, performance and lower power requirements with DDR5 memory that support up to 1 TB memory capacity with 8 channels per processor.
- Advanced data transfer rates from the PCIe Gen5 serial expansion bus.
- Includes HPE Integrated Lights-Out 6 (iLO 6) server management software that enables you to securely configure, monitor, and update your HPE ProLiant Gen11 servers seamlessly from anywhere.
- Supports LFF/SFF backplane and hot-pluggable RAID1 protected NS204i-u M.2 NVMe boot option.

Platform Information

Form Factor

- 4.5U tower with rack conversion capability

Notes: When deployed as a Rack model, this system will take up 5.5U-height space in a standard data center rack facility.

Chassis Types

- 8 SFF chassis with optional SFF drive cage kit, 1 Optical Drive, 1 USB internal RDX docking station supported.
- 4 LFF chassis with optional LFF or SFF drive cage kit, 1 Optical Drive, 1 USB internal RDX docking station supported.

Notes: Mixed SFF and LFF drive cages is supported with LFF chassis, up to 2 drive cages.

System Fans

- Standard – 2 fans included with optional Redundant Fan Kit.

Notes:

When one of the following scenarios occurs, Redundant Fan Kit (P49984-B21) is required.

- Server with the following options installed:
 - o SAS 15K RPM SFF HDD.
 - o SAS4 SFF SSD drives consume power equal to or higher than 15W.
 - o HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device.
 - Server is required to continue operating with single fan failure. A flashing amber Health LED will indicate this condition.
 - Server is required to operate with the A3/A4 extended operating environment with ambient temperature 35°C (95°F) to 45°C (113°F).
-



Standard Features

Processors – One of the following, depending on model.

Notes: For more information regarding Intel Xeon processors, please see the following

<https://www.intel.sg/content/www/xa/en/processors/xeon/scalable/xeon-scalable-platform.html>.

Intel Fourth Generation Xeon® Scalable Processors – Naming Decoder

| Processor Suffix | Description | Offering |
|------------------|---------------------------------------|--|
| P | Cloud – IaaS | Optimized for high performance IaaS for orchestration efficiency - IaaS higher freq. for VM environments |
| V | Cloud – SaaS | Designed for high rack density, maximize VM/core, and lower power VM environment |
| M | Media Transcode | Designed for Media Processing and Transcoding |
| H | DB and Analytics | Designed for Data Analytics and Big Data usages. Maximum capability for IAA, DSA, QAT, DLB and AMX. Supported on 2, 4 and 8 socket platforms. |
| N | Network/5G/Edge(High TPT/Low Latency) | Designed and optimized for a range of broadly-deployed network and 5G workload environments from edge to the data center. Support network solutions with lower latency, higher throughput, deterministic performance and extended supply life. Maximum capability for DLB, DSA and QAT – for Dynamic Load Balancing, Data Movement and Cryptography/Data Compression. 1S SKUs –Optimized for Network (default mode), CSP (Cloud mode) and Enterprise (Server mode) |
| S | Storage & HCI | Designed to provide maximum inter-socket bandwidth with lower core counts and TDPs. Extended product supply life. Maximum capability for DSA, QAT and DLB – for Data Movement and Data Compression |
| T | Long-life Use/High Tcase | Support for up to 10-year reliability. Select SKUs offer use for industrial commercial temperature conditions. Long life availability |
| U | 1-Socket Optimized* | Provides cost-effective 1S options at lower core counts, largely for Enterprise |
| Q | Liquid cooling | Provides higher frequencies |
| + | Feature + | Feature Plus SKU – Enabled 1 for each accelerator device of QAT, DLB, DSA, IAX |

Intel Fourth Generation Xeon® Scalable Processors

| Intel Xeon Models | CPU Frequency | Cores | L3 Cache | Power | UPI (16 GT/s) | DDR5 | SGX Enclave size |
|--------------------------|---------------|-------|----------|-------|---------------|-----------|------------------|
| Gold Processors | | | | | | | |
| Gold 6426Y Processor | 2.5 GHz | 16 | 37.5 MB | 185W | 3 | 4800 MT/s | 128 GB |
| Gold 6421N Processor* | 1.8 GHz | 32 | 60 MB | 185W | N/A | 4400 MT/s | 128 GB |
| Gold 5418Y Processor | 2.0 GHz | 24 | 45 MB | 185W | 3 | 4400 MT/s | 128 GB |
| Gold 5412U Processor* | 2.1 GHz | 24 | 45 MB | 185W | N/A | 4400 MT/s | 128 GB |
| Gold 5411N Processor* | 1.9 GHz | 24 | 45 MB | 165W | N/A | 4400 MT/s | 128 GB |
| Gold 5418N Processor | 1.8 GHz | 24 | 45 MB | 165W | 3 | 4000 MT/s | 128 GB |
| Gold 5415+ Processor | 2.9 GHz | 8 | 22.5 MB | 150W | 3 | 4400 MT/s | 128 GB |
| Gold 5416S Processor | 2.0 GHz | 16 | 30 MB | 150W | 3 | 4400 MT/s | 128 GB |
| Silver Processors | | | | | | | |
| Silver 4416+ Processor | 2.0 GHz | 20 | 37.5 MB | 165W | 2 | 4000 MT/s | 64 GB |
| Silver 4410Y Processor | 2.0 GHz | 12 | 30 MB | 150W | 2 | 4000 MT/s | 64 GB |
| Bronze Processor | | | | | | | |
| Bronze 3408U Processor* | 1.8 GHz | 8 | 22.5 MB | 125W | N/A | 4000 MT/s | 64 GB |

Notes:

- 80 PCIe 5.0 lanes per processor.
- * “U” processors (i.e. 5412U, 3408U) and 6421N, 5411N are only supported in single socket configuration.
- The maximum memory speed and capacity is a function of the memory type, memory configuration, and processor model.

Standard Features

Chipset

Intel® C741 Chipset

Notes: For more information regarding Intel® chipsets, please see the following URL:

<https://www.intel.com/content/www/us/en/products/chipsets/server-chipsets.html>

System Management Chipset

HPE iLO 6 ASIC

Notes: Read and learn more in the [iLO QuickSpecs](#).

Memory

One of the following depending on model

| | |
|---------------------------------|--|
| Type | HPE DDR5 SmartMemory, Registered (RDIMM) |
| DIMM Slots Available | 16 DIMM slots 16 DIMM slots per processor, 8 channels per processor, 2 DIMM per channel |
| Maximum capacity (RDIMM) | 1.0TB 16 x 64 GB RDIMM @ 4400MT/s at 2 DPC, 16 x 256 GB RDIMM @ 4800 MT/s at 1 DPC |

Notes:

- The maximum memory speed and capacity is a function of the memory type, memory configuration, and processor model.
- Mixing of RDIMM and LRDIMM memory is not supported.
- For additional information, please see the [HPE DDR5 Smart Memory QuickSpecs](#).
- For General Server Memory and Persistent Memory Population Rules and Guidelines for Gen11 see details here: <http://www.hpe.com/docs/memory-population-rules>

Memory Protection

Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.

Online Spare

Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.

Notes: For more information see our [Memory RAS feature technical whitepaper](#).

Expansion Slots

Default Slots

Notes:

- Bus width indicates the number of physical electrical lanes running to the connector.
- There are two PCIe Gen5 x16 slots is available by default:

| Default Slots | | | | | |
|---------------|-----------|------------|-----------|-----------------|-------------------------------|
| Slots # | Processor | Technology | Bus Width | Connector Width | Slot Form Factor |
| 1 | CPU 1 | PCIe 5.0 | X16 | X16 | Full-height, full-length slot |
| 4 | CPU 1 | PCIe 5.0 | X16 | X16 | Full-height, half-length slot |



Standard Features

Optional GPU Riser Kit

Notes:

- Bus width indicates the number of physical electrical lanes running to the connector.
- Double Width expansion card is only supported with slot 2 and results slot 3 space been occupied.
- Two GPU Riser Kit types:
 - o HPE ProLiant ML110 Gen11 GPU Riser Kit (P53487-B21) provides Slot 2 as PCIe Gen5 x16 slot included riser cage, PCA and cables.
 - o HPE ProLiant ML110 Gen11 Second GPU Riser Kit (P53488-B21) provides Slot 3 as PCIe Gen5 x16 slot included PCA and cables only, Thus HPE ProLiant ML110 Gen11 GPU Riser Kit (P53487-B21) is required while Second GPU riser kit selected.

HPE ProLiant ML110 Gen11 GPU Riser Kit

| Slots # | Processor | Technology | Bus Width | Connector Width | Slot Form Factor |
|---------|-----------|------------|-----------|-----------------|-------------------------------|
| 2 | CPU 1 | PCIe 5.0 | X16 | X16 | Full-height, full-length slot |
| 3 | CPU 1 | PCIe 5.0 | X16 | X16 | Full-height, full-length slot |

Internal Storage Devices

- **Optical Drive**
Available as an option (DVD-ROM or DVD-RW)
- **Hard Disk Drive/ Solid State Drive**
Available as an option

Storage Controllers

NVMe Boot Devices

- HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device

Software RAID

- **Intel VROC SATA for HPE ProLiant Gen11**

Notes:

- All models feature an embedded storage controller, with embedded software SATA RAID support for up to 14 bays.
- Intel VROC for HPE ProLiant Gen11 is an enterprise, hybrid Software RAID solution specifically designed for SSDs.
- Intel VROC is a software-based solution utilizing Intel CPU to RAID or HBA direct connected drives.
- RAID Support- 0/1/5/10.
- Windows and Linux OS support.
- Host Tools- Windows GUI/CLI, Linux CLI.
- UEFI Support- HII Utility, OBSE.
- iLO Support- IML, Alert, SNMP, AHS.
- iLO Redfish- Redfish Read .
- Intel VROC SATA for HPE ProLiant Gen11 will operate in UEFI mode only. For legacy support an additional storage controller will be needed.
- Intel VROC SATA is off by default and must be enabled.

- **Intel VROC NVMe for HPE ProLiant Gen11**

Notes:

- All models feature 4 x8 PCIe 5.0 connectors per socket for NVMe connectivity, provides support for up to 8 direct attach x4 NVMe bays.
- Intel VROC for HPE ProLiant Gen11 is an enterprise, hybrid Software RAID solution specifically



Standard Features

designed for NVMe SSDs connected directly to the CPU. Intel VROC is a software-based solution utilizing Intel CPU to RAID or HBA direct connected drives.

- Intel Virtual RAID on CPU Standard for RAID 0/1/10 (S0E37A/S0E38AAE) or Premium SKU for RAID 0/1/5/10 (R7J57A/R7J59AAE) must be ordered to enable RAID support.
- Windows, Linux, VMware OS support.
- Host Tools- Windows GUI/CLI, Linux CLI.
- UEFI Support- HII Utility, OBSE.
- Active health monitoring of NVMe M.2 drives requires use of SMART tools.
- Intel VROC NVMe for HPE ProLiant Gen11 will operate in UEFI mode only. For legacy support an additional Tri-Mode controller will be needed.
- For NVMe SSDs only, no PCIe card support.
- ML110 Gen11 supports up to 2x M.2 NVMe drives on onboard slots with Intel Virtual RAID on CPU Standard for RAID 0/1/10 (S0E37A/S0E38AAE).

Essential RAID Controllers

- HPE Smart Array E208e-p SR Gen10 Controller

Tri-mode RAID Controllers

- HPE MR216i-o Gen11 x16 Lanes without Cache OCP SPDM Storage Controller
- HPE MR216i-p Gen11 x16 Lanes without Cache OCP SPDM Storage Controller
- HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller
- HPE MR416i-o Gen11 x16 Lanes 8GB Cache OCP SPDM Storage Controller

Maximum Storage

| Drive | Capacity | Configuration |
|----------------------------------|----------------|---|
| Hot Plug LFF SAS HDD | 160 TB | 8 x20 TB |
| Hot Plug LFF SAS SSD | 61.44 TB | 8 x7.68 TB |
| Hot Plug LFF SATA HDD | 160 TB | 8 x20 TB |
| Hot Plug LFF SATA SSD | 7.68 TB | 8 x960 GB |
| Hot Plug SFF SAS HDD | 38.4 TB | 16 x2.4TB |
| Hot Plug SFF SAS SSD | 245.76 TB | 16 x15.36 TB |
| Hot Plug SFF SATA HDD | 32 TB | 16 x2 TB |
| Hot Plug SFF SATA SSD | 122.88 TB | 16 x7.68 TB |
| Hot Plug NVMe M.2 SSD | 480 GB | 2 x480 GB (NS204i-u boot option with RAID1 protected) |
| SATA/NVMe M.2 SSD (Onboard slot) | 960 GB/3.84 TB | 2 x480 GB/2 x1.92 TB |

Graphics

Integrated Video Standard

- Video modes up to 1920 x 1200@60Hz (32 bpp)
- 16MB Video Memory

HPE iLO 6 on system management memory

- 64 MB Flash
- 8 Gbit DDR 4 with ECC protection



Standard Features

Power Supply

- HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes: Available in 94% Power Efficiency
- HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes: Available in 94% Power Efficiency
- HPE 1000W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit
Notes: Available in 96% Power Efficiency
- HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes:
 - Available in 94% Power Efficiency.
 - 200-240VAC power input only.

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen11 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with regional specific power cord with tower server. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#)

Interfaces

| | |
|---|---|
| Serial | Optional, rear |
| Display Port | 1 standard, front |
| VGA Port | 1 VGA Port standard, rear |
| Network Ports | 2x1GbE. Choice of OCP or stand up card |
| HPE iLO Remote Management Network Port | 1 GbE Dedicated, rear |
| Front iLO Service Port | 1 standard, front |
| USB 3.2 Gen1 | 4 standard on all models: 1 front, 2 rear, 1 internal |
| USB 2.0 | 1 internal |



Standard Features

Operating Systems and Virtualization Software Support

- See [HPE Servers Support & Certification Matrices](#)
 - [Microsoft Windows Server](#)
 - [VMware ESXi](#)
 - [Red Hat Enterprise Linux \(RHEL\)](#)
 - [SUSE Linux Enterprise Server \(SLES\)](#)
 - [Canonical Ubuntu](#)
 - [Oracle Linux and Oracle VM](#)
 - [Citrix](#)

Notes: For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server.

<https://www.hpe.com/us/en/servers/server-operating-systems.html>

HPE Server UEFI

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen11 servers have a UEFI Class 3 implementation.

Notes: The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as

- Secure Boot and Secure Start enabled for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.2 Gen1 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv4 IPv6 networks
- Workload Profiles for simple performance optimization

UEFI Boot Mode only

- TPM 2.0 Support
- NVMe Boot Support
- iSCSI Software Initiator Support.
- HTTP/HTTPs Boot support as a PXE alternative.
- Boot support for option cards that only support a UEFI option ROM

Notes: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

Industry Standard Compliance

- ACPI 6.4 Compliant
- PCIe 5.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- Support for Microsoft Secure Code
- PXE Support
- VGA/Display Port
- USB 3.2 Gen1 Compliant
- USB 2.0 Compliant
- OCP 3.0 SFF NIC Support



Standard Features

- OCP 3.0 SFF Storage Support
- Embedded TPM Support
- Energy Star
- SMBIOS 3.4
- UEFI 2.7
- UEFI Class 3 (Unified Extensible Firmware Interface Forum)
- Redfish API
- IPMI 2.0
- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP)
- DMTF Redfish support for SecureBoot Key Management
- ACPI DSM Drive LED Management
- Memory Page Retire Support
- Retire old VMware Secure Boot Key
- MCTP
- I3C Engine
- APML
- Active Directory v1.0
- ASHRAE A3/A4

Notes: For additional technical, thermal details regarding ambient temperature, humidity, and feature support, please visit <https://www.hpe.com/support/ASHRAEGen11>

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <http://www.hpe.com/info/ilo>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <http://www.hpe.com/servers/uefi>

Intelligent Provisioning

Hassle free server and OS provisioning for 1 or more servers with Intelligent Provisioning. Learn more at <http://www.hpe.com/servers/intelligentprovisioning>

iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>

HPE GreenLake for Compute Ops Management

HPE is intelligently transforming compute management with an intuitive cloud operating experience through HPE GreenLake cloud platform to streamline and secure operations from edge-to-cloud. Automated key lifecycle tasks, for onboarding, updating, managing, and monitoring HPE servers, brings agility and greater efficiencies to wherever compute devices reside via a unified single browser-based interface. Manage single locations or multiple, distributed sites. Keep tens to thousands of servers secure with batch policy controls and automated updates.



Standard Features

Compute Ops Management is cloud-native software that is continually updated with new services, features, patches, and fixes. The management application resides in the HPE GreenLake cloud platform (access via <https://console.greenlake.hpe.com>) and leverages the HPE GreenLake architecture, security, and unified operations.

Each HPE ProLiant Gen11 rack, tower and micro server will include a 3-year subscription to HPE GreenLake for Compute Ops Management.

For more information, visit the HPE GreenLake for Compute Ops Management QuickSpecs:

<https://www.hpe.com/psnow/doc/a50004263enw>

Server Utilities

Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>

Active Health System Viewer

The Active System Health Viewer (AHSV) was deprecated as of March 2022. Users are now recommended to use the InfoSight (<https://www.hpe.com/us/en/solutions/infosight.html>) for Servers Portal for AHS viewing capabilities. In InfoSight for Servers portal, users will also be able to view hardware configuration details, firmware and driver information, warranty and support status of a server, wellness alerts, and create support cases for servers under a valid warranty or support contract.

HPE InfoSight provides the same security assurances as that of AHSV. Furthermore, InfoSight can be used as an AHSV replacement even if customers do not want to share AHSV logs and telemetry data on an ongoing basis.

Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP).

Learn more at <https://www.hpe.com/us/en/servers/smart-update.html>

iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9, Gen10 and Gen11 HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities.

Learn more at <http://www.hpe.com/servers/iLOamplifierpack>

RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>

Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <http://www.hpe.com/servers/powershell>

HPE OneView Standard

HPE OneView is an on premises, multi-generational server monitoring and management solution. HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. Customers can upgrade their management experience with an HPE OneView Advanced license, all provided by the same tool. Learn more at

<http://www.hpe.com/info/oneview>.



Standard Features

Security

- UEFI Secure Boot and Secure Start support
- Immutable Silicon Root of Trust
- FIPS 140-3 validation (iLO 6 certification in progress)
- Common Criteria certification (iLO 6 certification in progress)
- Configurable for PCI DSS compliance
- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Support for Commercial National Security Algorithms (CNSA)
- Tamper-free updates – components digitally signed and verified
- Secure Recovery – recover critical firmware to known good state on detection of compromised firmware
- Ability to rollback firmware
- Secure erase of NAND
- TPM (Trusted Platform Module) 2.0
- Front bezel key-lock feature – standard, available in both Tower and Rack models
- Padlock slot, standard
- Kensington Lock slot, standard
- Chassis Intrusion detection option

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Notes: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. 3) Non CSR parts must be serviced by a trained authorized service engineer. Additional information regarding worldwide limited warranty and technical support is available at: <http://h17007.www1.hp.com/us/en/enterprise/servers/warranty/>



Optional Features

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

HPE OneView Advanced-

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9, Gen10 and Gen11 servers. To learn more visit <http://www.hpe.com/info/oneview>.

HPE InfoSight for Servers

HPE InfoSight for Servers combines the cloud-based machine learning of InfoSight with the health and performance monitoring of Active Health System (AHS) and iLO to optimize performance and predict and prevent problems. The end result is an intelligent environment that modernizes IT operations and enhances the support experience by predicting and preventing the infrastructure issues that lead to application disruptions, wasted IT staff time and missed business opportunities.

Learn more at <https://www.hpe.com/servers/infosight>

HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.hpe.com/info/cmu>.

Accelerator and GPGPU Information

Hewlett Packard Enterprise supports various accelerators on select HPE ProLiant servers to support different workloads. The accelerators enable seamless integration of GPU computing with HPE ProLiant servers for high-performance computing, large data center graphics, deep learning and virtual desktop deployments. These accelerators deliver all of the standard benefits of GPU computing while enabling maximum reliability and tight integration with system monitoring and management tools such as HPE Insight Cluster Management Utility.

Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go – and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).



Optional Features

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance.

<https://h22174.www2.hpe.com/SimplifiedConfig/Welcome>



Service and Support

HPE Pointnext - Service and Support

HPE Pointnext Services No matter where you are in your digital transformation journey, you can count on HPE Pointnext Services to provide the expertise you need, when and where you need it.

Advisory and Professional Services

Advisory Services our Digital Next Advisory approach can help you identify, prioritize, and implement the right transformation initiatives to create new edge experiences, get real-time insights from all your data, and modernize your IT to enable new opportunities.

Operational Services

Operational Services take your IT operations to the next level with expertise and tools that can help save your staff time, manage complexity, and identify new ways to drive efficiency and effectiveness in your IT.

Consume IT on your terms

HPE GreenLake brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake accelerates digital transformation in a distributed, edge-to-cloud world.

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

Managed services to run your IT operations

HPE GreenLake Management Services provide services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

Recommended Services

HPE Pointnext Tech Care

HPE Pointnext Tech Care is the new operational service experience for HPE products. Tech Care goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Pointnext Tech Care has been reimagined from the ground up to support a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Pointnext Tech Care is available in three response levels. Basic, which provides 9x5 business hour availability and a 2-hour response time. Essential which provides a 15-minute response time 24x7 for most enterprise level customers, and Critical which includes a 6-hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>

HPE Pointnext Complete Care

HPE Pointnext Complete Care is a modular, edge-to-cloud IT environment service that provides a holistic approach to optimizing your entire IT environment and achieving agreed upon IT outcomes and business goals through a personalized and customer-centric experience. All delivered by an assigned team of HPE Pointnext Services experts. HPE Pointnext Complete Care provides:

- A complete coverage approach -- edge to cloud
- An assigned HPE team
- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI driven customer experience

<https://www.hpe.com/services/completercare>



Service and Support

HPE Lifecycle Services

Lifecycle Services provide a variety of options to help maintain your HPE systems and solutions at all stages of the product lifecycle. A few popular examples include:

- Installation and Startup Services: Various levels for physical installation and power on, remote access setup, installation and startup, and enhanced installation services with the operating system.
- HPE Firmware Update Service: Recommendations for firmware revision levels for selected HPE products, taking into account the relevant revision dependencies within your IT environment.
- HPE Firmware Update Implementation Service: Implementation of firmware updates for selected HPE server, storage, and solution products, taking into account the relevant revision dependencies within your IT environment.
- HPE Implementation Assistance Service: Highly trained technical service specialists to assist you with a variety of activities, ranging from design, implementation, and platform deployment to consolidation, migration, project management, and onsite technical forums.
- HPE Service Credits: Access to prepaid services for flexibility to choose from a variety of specialized service activities, including assessments, performance maintenance reviews, firmware management, professional services, and operational best practices.
 - For a list of the most frequently purchased services using service credits, see the **[Universal Service Credits Menu](#)**

Other related Services

HPE Education Services

Provides comprehensive training designed to expand the skills of your IT staff and keep them up to speed with the latest technologies.

Defective Media Retention

An option available with HPE Pointnext Complete Care and HPE Pointnext Tech Care and applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

Consult your HPE Sales Representative or Authorized Channel Partner of choice for any additional questions and support options.

AI Powered and Digitally Enabled Support Experience

Achieve faster time to resolution with access to product-specific resources and expertise through a brand-new digital and data driven customer experience.

Sign into the new HPE Support Center experience, featuring streamlined self-serve case creation and management capabilities with inline knowledge recommendations. You will also find personalized task alerts, and powerful troubleshooting support through a new intelligent virtual agent with seamless transition when needed to a live support agent.

Learn more <https://support.hpe.com/hpesc/public/home/signin>

HPE Support Services are sold by Hewlett Packard Enterprise and Hewlett Packard Enterprise Authorized Service Partners:

- Services for customers purchasing from HPE or an enterprise reseller are quoted using HPE order configuration tools.
 - Customers purchasing from a commercial reseller can find HPE Support Services at <https://ssc.hpe.com/portal/site/ssc/>
-

Service and Support

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.



Pre-configured Models

For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

- Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
- Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.
- If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

The pre-configured BTO SKUs are right-sized for use with a single CPU, a single DDR5 DIMM, and a single network controller. The storage subsystem can support either 8SFF or 4LFF drives attached to a storage controller or SATA direct connected to motherboard. The pre-configured power supply unit is sufficient for these reasonable configurations. In cases where the final configuration will be increased by adding more memory, drives, GPUs, or other components please refer to the

HPE Power Advisor Tool for configuration guidance, as your desired configuration may require a second PSU or building the configuration as Configure To Order (CTO) may be best.

| The 4th Generation Intel Xeon® Scalable Processor-based WW BTO SKUs | | | |
|---|---|---|--|
| | Entry LFF Model | Entry LFF Model | Base SFF Model |
| SMB Offer – BASE | Performance 1 | Performance 1 | Performance 2 |
| [SKU Number] | P55533-001 (AMS) P55533-291 (Japan) P55533-371 (APAC) P55533-AA1 (China) | P55534-001 (AMS) | P55535-001 (AMS) P55535-291 (Japan) P55535-371 (APAC) P55535-AA1 (China) |
| Model Name | HPE ProLiant ML110 Gen11 3408U 1.8GHz 8-core 1P 16GB-R VROC 4LFF 500W RPS Server | HPE ProLiant ML110 Gen11 3408U 1.8GHz 8-core 1P 16GB-R VROC 4LFF 4TB 500W RPS Server | HPE ProLiant ML110 Gen11 3408U 1.8GHz 8-core 1P 32GB- R VROC 8SFF 800W RPS Server |
| Processor | 3408U (8-Core, 1.8 GHz, 125W) | | |
| Number of Processors | One processor | | |
| Memory* | HPE 16GB 1Rx8 PC5-4800B-R Smart Kit | | HPE 32GB 2Rx8 PC5-4800B-R Smart Kit |
| Network Controller | Embedded 2-Port 1GbE networking ports | | |
| Storage Controller | Embedded 8 SATA ports controller with Intel® VROC Software RAID. Notes: Only SATA drive supported with embedded controller, o-type or p-type controller is required for SAS drive support. | | |
| Hard Drive | None ship as standard | Included 1x 4TB SATA drive | None ship as standard |
| Internal Storage | 4LFF SAS/SATA Drive Cage | | 8SFF SAS/SATA Drive Cage |
| Optical Drive | None ship as standard Notes: HPE ProLiant ML110 Gen11 Optical Disk Drive Cable Kit (P57364-B21) is required for optical drive. | | |
| PCI-Express Slots | PCIe 5.0: 2 slots (x16), upgradable to 4 slots (x16) OCP 3.0 with PCIe Gen 5.0: 1 slot (x16) | | |
| Power Supply | 1x HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit Notes: Optional HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (865408-B21) provides 1+1 power redundancy feature. | | 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit Notes: Optional HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (P38995-B21) provides 1+1 power redundancy feature. |
| Fans | Default with 2 standard fans, none-hot-plug. Notes: Optional HPE ProLiant ML110 Gen11 Redundant Fan Kit (P49984-B21) provides advanced cooling in heavier configurations and redundancy functionality. Configurations that require fan kits are provided in later sections. | | |

Pre-configured Models

| | |
|--------------------|---|
| Management | HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); HPE iLO Advanced and HPE OneView Advanced (require licenses) |
| Energy Star | Certified |
| ErP Lot 9 | ErP Lot 9 compliant |
| Form Factor | 4.5U Tower Notes: Optional Tower-to-Rack conversion kit (P47394-B21) to convert the unit to a 5.5U Rack-mount server. |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. |

Notes: The maximum memory speed is a function of the memory type, memory configuration, and processor model.

| The 4th Generation Intel Xeon® Scalable Processor-based WW BTO SKUs | | |
|---|---|---|
| | Performance SFF Model | Performance 2 SFF Model |
| SMB Offer – BASE | Performance 3 | Performance 4 |
| [SKU Number] | P55536-001 (AMS) P55536-291 (Japan) P55536-371 (APAC) P55536-AA1 (China) | P55537-001 (AMS) P55537-291 (Japan) P55537-371 (APAC) P55537-AA1 (China) |
| Model Name | HPE ProLiant ML110 Gen11 4410Y 2.0GHz 12-core 1P 32GB-R VROC 8SFF 800W RPS Server | HPE ProLiant ML110 Gen11 5416S 2.0GHz 16-core 1P 32GB-R VROC 8SFF 800W RPS Server |
| Processor | 4410Y (12-Core, 2.0 GHz, 150W) | 5416S (16-Core, 2.0 GHz, 150W) |
| Number of Processors | One processor | |
| Memory | HPE 32GB 2Rx8 PC5-4800B-R Smart Kit Notes: The maximum memory speed is a function of the memory type, memory configuration, and processor model. | |
| Network Controller | Embedded 2-Port 1GbE networking ports | |
| Storage Controller | Embedded 8 SATA ports controller with Intel® VROC Software RAID. Notes: Only SATA drive supported with embedded controller, o-type or p-type controller is required for SAS drive support. | |
| Hard Drive | None ship as standard | |
| Internal Storage | 8SFF SAS/SATA Drive Cage | |
| Optical Drive | None ship as standard Notes: HPE ProLiant ML110 Gen11 Optical Disk Drive Cable Kit (P57364-B21) is required for optical drive. | |
| PCI-Express Slots | PCIe 5.0: 2 slots (x16), upgradable to 4 slots (x16) OCP 3.0 with PCIe Gen 5.0: 1 slot (x16) | |
| Power Supply | 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit Notes: Optional HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (P38995-B21) provides 1+1 power redundancy feature. | |
| Fans | Default with 2 standard fans, none-hot-plug. Notes: Optional HPE ProLiant ML110 Gen11 Redundant Fan Kit (P49984-B21) provides advanced cooling in heavier configurations and redundancy functionality. Configurations that require fan kits are provided in later sections. | |
| Management | HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); HPE iLO Advanced and HPE OneView Advanced (require licenses) | |
| Energy Star | Certified | |
| ErP Lot 9 | ErP Lot 9 compliant | |
| Form Factor | 4.5U Tower Notes: Optional Tower-to-Rack conversion kit (P47394-B21) to convert the unit to a 5.5U Rack-mount server. | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | |



Pre-configured Models

| The 4th Generation Intel Xeon® Scalable Processor-based EMEA BTO SKUs | | | |
|---|---|---|--|
| | Entry LFF Model | Entry LFF Model | Base SFF Model |
| SMB Offer – BASE | Performance 1 | Performance 1 | Performance 2 |
| [SKU Number] | P55637-421(EMEA) | P55638-421(EMEA) | P55639-421(EMEA) |
| Model Name | HPE ProLiant ML110 Gen11 3408U 1.8GHz 8-core 1P 16GB-R VROC 4LFF 500W RPS Server | HPE ProLiant ML110 Gen11 3408U 1.8GHz 8-core 1P 16GB-R VROC 4LFF 4TB 500W RPS Server | HPE ProLiant ML110 Gen11 3408U 1.8GHz 8-core 1P 32GB- R VROC 8SFF 800W RPS Server |
| Processor | 3408U (8-Core, 1.8 GHz, 125W) | | |
| Number of Processors | One processor | | |
| Memory* | HPE 16GB 1Rx8 PC5-4800B-R Smart Kit | | HPE 32GB 2Rx8 PC5-4800B-R Smart Kit |
| Network Controller | Embedded 2-Port 1GbE networking ports | | |
| Storage Controller | Embedded 8 SATA ports controller with Intel® VROC Software RAID. Notes: Only SATA drive supported with embedded controller, o-type or p-type controller is required for SAS drive support. | | |
| Hard Drive | None ship as standard | Included 1x 4TB SATA drive | None ship as standard |
| Internal Storage | 4LFF SAS/SATA Drive Cage | | 8SFF SAS/SATA Drive Cage |
| Optical Drive | None ship as standard Notes: HPE ProLiant ML110 Gen11 Optical Disk Drive Cable Kit (P57364-B21) is required for optical drive. | | |
| PCI-Express Slots | PCIe 5.0: 2 slots (x16), upgradable to 4 slots (x16) OCP 3.0 with PCIe Gen 5.0: 1 slot (x16) | | |
| Power Supply | 1x HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit Notes: Optional HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (865408-B21) provides 1+1 power redundancy feature. | | 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit Notes: Optional HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (P38995-B21) provides 1+1 power redundancy feature. |
| Fans | Default with 2 standard fans, none-hot-plug. Notes: Optional HPE ProLiant ML110 Gen11 Redundant Fan Kit (P49984-B21) provides advanced cooling in heavier configurations and redundancy functionality. Configurations that require fan kits are provided in later sections. | | |
| Management | HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); HPE iLO Advanced and HPE OneView Advanced (require licenses) | | |
| Energy Star | Certified | | |
| ErP Lot 9 | ErP Lot 9 compliant | | |
| Form Factor | 4.5U Tower Notes: Optional Tower-to-Rack conversion kit (P47394-B21) to convert the unit to a 5.5U Rack- mount server. | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Notes: The maximum memory speed is a function of the memory type, memory configuration, and processor model.



Pre-configured Models

| The 4th Generation Intel Xeon® Scalable Processor-based EMEA BTO SKUs | | |
|---|---|---|
| | Performance SFF Model | Performance 2 SFF Model |
| SMB Offer – BASE | Performance 3 | Performance 4 |
| [SKU Number] | P55640-421(EMEA) | P55641-421(EMEA) |
| Model Name | HPE ProLiant ML110 Gen11 4410Y 2.0GHz 12-core 1P 32GB-R VROC 8SFF 800W RPS Server | HPE ProLiant ML110 Gen11 5416S 2.0GHz 16-core 1P 32GB-R VROC 8SFF 800W RPS Server |
| Processor | 4410Y (12-Core, 2.0 GHz, 150W) | 5416S (16-Core, 2.0 GHz, 150W) |
| Number of Processors | One processor | |
| Memory | HPE 32GB 2Rx8 PC5-4800B-R Smart Kit Notes: The maximum memory speed is a function of the memory type, memory configuration, and processor model. | |
| Network Controller | Embedded 2-Port 1GbE networking ports | |
| Storage Controller | Embedded 8 SATA ports controller with Intel® VROC Software RAID. Notes: Only SATA drive supported with embedded controller, o-type or p-type controller is required for SAS drive support. | |
| Hard Drive | None ship as standard | |
| Internal Storage | 8SFF SAS/SATA Drive Cage Kit | |
| Optical Drive | None ship as standard Notes: HPE ProLiant ML110 Gen11 Optical Disk Drive Cable Kit (P57364-B21) is required for optical drive. | |
| PCI-Express Slots | PCIe 5.0: 2 slots (x16), upgradable to 4 slots (x16) OCP 3.0 with PCIe Gen 5.0: 1 slot (x16) | |
| Power Supply | 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit Notes: Optional HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (P38995-B21) provides 1+1 power redundancy feature. | |
| Fans | Default with 2 standard fans, none-hot-plug. Notes: Optional HPE ProLiant ML110 Gen11 Redundant Fan Kit (P49984-B21) provides advanced cooling in heavier configurations and redundancy functionality. Configurations that require fan kits are provided in later sections. | |
| Management | HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); HPE iLO Advanced and HPE OneView Advanced (require licenses) | |
| Energy Star | Certified | |
| ErP Lot 9 | ErP Lot 9 compliant | |
| Form Factor | 4.5U Tower Notes: Optional Tower-to-Rack conversion kit (P47394-B21) to convert the unit to a 5.5U Rack-mount server. | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | |

Pre-configured Models

| The 4th Generation Intel Xeon® Scalable Processor-based Argentina BTO SKUs | |
|--|---|
| | Entry LFF Model |
| SMB Offer – BASE | Performance 1 |
| [SKU Number] | P60805-001 (Argentina) |
| Model Name | HPE ProLiant ML110 Gen11 3408U 1.8GHz 8-core 1P 16GB-R VROC 4LFF 4TB 500W RPS Server |
| Processor | 3408U (8-Core, 1.8 GHz, 125W) |
| Number of Processors | One processor |
| Memory | HPE 16GB 1Rx8 PC5-4800B-R Smart Kit Notes: The maximum memory speed is a function of the memory type, memory configuration, and processor model. |
| Network Controller | Embedded 2-Port 1GbE networking ports |
| Storage Controller | Embedded 8 SATA ports controller with Intel® VROC Software RAID. Notes: Only SATA drive supported with embedded controller, o-type or p-type controller is required for SAS drive support. |
| Hard Drive | Included 1x 4TB SATA drive |
| Internal Storage | 4LFF SAS/SATA Drive Cage |
| Optical Drive | None ship as standard Notes: HPE ProLiant ML110 Gen11 Optical Disk Drive Cable Kit (P57364-B21) is required for optical drive. |
| PCI-Express Slots | PCIe 5.0: 2 slots (x16), upgradable to 4 slots (x16) OCP 3.0 with PCIe Gen 5.0: 1 slot (x16) |
| Power Supply | 1x HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit Notes: Optional HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (865408-B21) provides 1+1 power redundancy feature. |
| Fans | Default with 2 standard fans, none-hot-plug. Notes: Optional HPE ProLiant ML110 Gen11 Redundant Fan Kit (P49984-B21) provides advanced cooling in heavier configurations and redundancy functionality. Configurations that require fan kits are provided in later sections. |
| Management | HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); HPE iLO Advanced and HPE OneView Advanced (require licenses) |
| Energy Star | Certified |
| ErP Lot 9 | ErP Lot 9 compliant |
| Form Factor | 4.5U Tower Notes: Optional Tower-to-Rack conversion kit (P47394-B21) to convert the unit to a 5.5U Rack-mount server. |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. |



Configuration Information

Smart Templates from HPE

HPE is releasing new Smart Template technology in the One Config Advanced (OCA) configurator. These Templates represent the CTO equivalents of the top-selling BTO configurations. They are intended to provide simple starting points to assist you in easily creating and customizing your desired Server solutions. HPE Servers that have Platform Templates, developed by HPE Product Managers, will have a separate tab in the HPE OCA configurator.

Workload Solutions Templates from HPE

The Workload Solutions Templates build on the Smart Templates technology to easily develop working configurations of the most compelling Workload Solutions. The templates complement the Reference Builds developed by HPE. Workload Solutions templates preconfigure some of the key architecture decisions and make it easier for Sellers to get started and complete a differentiated server solution for your customer's specific workload.

Mainstream SKUs

HPE launched the Mainstream SKU initiative as a market-driven approach to Demand Steering. It is a simplified portfolio of our top selling options that meet the current and future market trends. HPE has committed to provide a more predictable and faster experience for these options. Mainstream SKUs enjoy higher safety stock levels and have higher fulfillment service levels than non-Mainstream SKUs. Mainstream orders are fulfilled +30% faster than non-Mainstream orders, have fewer shortages and better recovery dates. This platform has Mainstream SKUs in the options portfolio, and is eligible for the improved Mainstream experience. Mainstream SKUs are designated with a Mainstream symbol in our configurators.

Mainstream Configurations

HPE is using the new Smart Templates technology to present Mainstream configurations. All the options in a Mainstream configuration are pre-selected Mainstream SKUs to optimize the performance, predictability and fulfillment experience. Check the Template section in our configurators for eligible Mainstream configurations.

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory integratable option.
- All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

| CTO Server | HPE ML110 Gen11 LFF NHP CTO Server | HPE ML110 Gen11 LFF CTO Server | HPE ML110 Gen11 SFF CTO Server |
|-----------------------|---|--------------------------------|--------------------------------|
| SKU Number | P51516-B21 | P51517-B21 | P51518-B21 |
| Processor Sockets | 1 Socket available | | |
| Processor | Intel Fourth Generation Xeon® Scalable Processors | | |
| DIMM Slots | 16 DIMM slots available* | | |
| Storage Controller | Embedded 8 SATA ports controller with Intel® VROC Software RAID Choice of HPE OCP-type RAID (OROC) and/or PCIe Standup controller card (s) | | |
| PCIe | PCIe 5.0: 2 slots (x16), upgradable to 4 slots (x16) OCP 3.0 with PCIe Gen 5.0: 1 slot (x16) | | |
| Drive Cage - included | 4 LFF NHP SATA Drive Cage | 4LFF SAS/SATA Drive Cage | 8SFF SAS/SATA Drive Cage |



Configuration Information

| | | | |
|-------------------------------------|--|--|--|
| Additional drive cages | Optional 4 LFF NHP SATA Drive Cage kit, Up to 2 in total. Notes: Mixed SFF or LFF Drive Cage Kit with LFF NHP CTO server is not allowed. | Optional 4 LFF SAS/SATA Drive Cage and 8 SFF SAS/SATA Drive Cage kit, Up to 2 in total. Notes: Mixed SFF and LFF Drive Cage Kit, please select LFF CTO Server as base configuration and add 8 SFF Drive Cage Kit as second drive cage. | Optional 8 SFF SAS/SATA Drive Cage kit, Up to 2 in total |
| ODD | Optional, Up to 1 Notes: HPE ProLiant ML110 Gen11 Optical Disk Drive Cable Kit (P57364-B21) is required for optical drive. | | |
| Half-Height RDX | Optional, Up to 1 Notes: HPE ProLiant ML110 Gen11 RDX Cable Kit (P53491-B21) is required for RDX. | | |
| Megacell Battery | Optional | | |
| Network Controller | Embedded 2-Port 1GbE networking ports Choice of HPE OCP-type networking adapter and/or PCIe Standup controller card (s). | | |
| Redundant Fan Kit | Optional, 2 fans as standard Notes: Optional HPE ProLiant ML110 Gen11 Redundant Fan Kit (P49984-B21) provides advanced cooling in heavier configurations and redundancy functionality. | | |
| Power Supply | HPE Flex Slot Hot Plug Power Supply Kit, up to 2 | | |
| Management | HPE iLO with Intelligent Provisioning (standard), iLO Advances and OneView (optional), HPE GreenLake for Compute Ops Management (subscription included) | | |
| USB | 5x USB 3.2 Gen1/2.0 ports, Plus front iLO Service Port | | |
| Tower-to-Rack conversion kit | Optional Notes: Tower to Rack kit is not factory integratable option and only can be shipped with standalone package. | | |

Notes:

- When one of the following scenarios occurs, Redundant Fan Kit (P49984-B21) is required. Server with the following options installed:
 - o SAS 15K RPM SFF HDD.
 - o SAS4 SFF SSD drives consume power equal to or higher than 15W.
 - o HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device.
 Server is required to continue operating with single fan failure. A flashing amber Health LED will indicate this condition. Server is required to operate with the A3/A4 extended operating environment with ambient temperature 35°C (95°F) to 45°C (113°F).
- Mixed LFF and SFF Drive cages can be supported in one system. Please select the LFF CTO Server (P51517-B21) as the base configuration to start with.
- Refer to **HPE Power Advisor Tool** to review the power requirement for your selected configuration and determine what power supply module(s) to select.



Configuration Information

Step 2: Choose Required Options (Only one of the following unless otherwise noted)

Step 2a: Choose Processors

Processor Option Kits – Intel Fourth Generation Xeon® Scalable Processors

Notes:

- DDR5 memory speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.
- 4800 MT/S maximum memory speed unless otherwise noted.
- 128GB SGX Enclave unless otherwise noted.

Intel Xeon-Gold Processors

Intel Xeon-Gold 6426Y 2.5GHz 16-core 185W Processor for HPE P49598-B21

Intel Xeon-Gold 6421N 1.8GHz 32-core 185W Processor for HPE P49641-B21

Notes: 4400 MT/s maximum memory speed.

Intel Xeon-Gold 5418Y 2.0GHz 24-core 185W Processor for HPE P49640-B21

Notes: 4400 MT/s maximum memory speed.

Intel Xeon-Gold 5412U 2.1GHz 24-core 185W Processor for HPE P49618-B21

Notes: 4400 MT/s maximum memory speed.

Intel Xeon-Gold 5418Y 2.0GHz 24-core 185W Processor for HPE P49612-B21

Notes: 4400 MT/s maximum memory speed.

Intel Xeon-Gold 5418N 1.8GHz 24-core 165W Processor for HPE P49653-B21

Notes: 4000 MT/s maximum memory speed.

Intel Xeon-Gold 5415+ 2.9GHz 8-core 150W Processor for HPE P49639-B21

Notes: 4400 MT/s maximum memory speed.

Intel Xeon-Gold 5415+ 2.9GHz 8-core 150W Processor for HPE P49597-B21

Notes: 4400 MT/s maximum memory speed.

Intel Xeon-Silver Processors

Intel Xeon-Silver 4416+ 2.0GHz 20-core 165W Processor for HPE P49611-B21

Notes:

- 4000 MT/s maximum memory speed.
- 64GB SGX Enclave.

Intel Xeon-Silver 4410Y 2.0GHz 12-core 150W Processor for HPE P49610-B21

Notes:

- 4000 MT/s maximum memory speed.
- 64GB SGX Enclave.

Intel Xeon-Bronze Processors

Intel Xeon-Bronze 3408U 1.8GHz 8-core 125W Processor for HPE P49617-B21

Notes:

- 4000 MT/s maximum memory speed.
- 64GB SGX Enclave.

Step 2b: Choose Memory Options

Please select one or more memory from below.

For new Gen11 memory population rule whitepaper and optimal memory performance guidelines, please go to:

<https://www.hpe.com/docs/memory-population-rules>

For Gen11 memory speed table, please go to: <https://www.hpe.com/docs/memory-speed-table>



Configuration Information

For memory Reliability, Accessibility, Serviceability (RAS) features whitepaper like Gen10 Fast Fault Tolerance and legacy mirrored memory feature etc. please go to: <http://www.hpe.com/docs/memory-ras-feature>

Notes:

- The maximum memory speed and capacity is a function of the memory type, memory configuration, and processor model.
- Quantity of memory DIMMs selected per socket must be 1, 2, 4, 6, 8, 12 or 16.
- For additional information, please see the [HPE DDR5 Smart Memory QuickSpecs](#).
- For General Server Memory and Persistent Memory Population Rules and Guidelines, see details here: <http://www.hpe.com/docs/memory-population-rules>
- HPE Server Memory compatibility for a specific server platform may vary or be limited within a server platform depending upon the specific configuration being requested. Because each server environment and requirements can vary, memory compatibility is based not only upon the server family, but may also be affected by the amount and type of additional hardware options installed within a specific server configuration. For this reason, some HPE memory DIMMs may be qualified for an HPE server model or family and yet occasionally not be supported with some configurations within that server family.

Memory – for the Fourth Generation Intel Xeon® Scalable Processors

Description

| | |
|---|------------|
| HPE 16GB (1x16GB) Single Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit | P43322-B21 |
| HPE 32GB (1x32GB) Dual Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit | P43328-B21 |
| HPE 64GB (1x64GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit | P43331-B21 |

Step 2c: Choose Power Supplies

Notes:

- Mixing of 2 different power supplies is NOT supported.
- Selection of two HPE Flex Slot power supplies provide 1+1 power redundancy.
- To review the power requirements for your selected configuration, please use the [HPE Power Advisor Tool](#).

Power Supplies

| | |
|---|------------|
| HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | 865408-B21 |
|---|------------|

Notes: Support limited to single 125W Processor.

| | |
|--|------------|
| HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | P38995-B21 |
| HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit | P03178-B21 |
| HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | P38997-B21 |

Notes: Only supports high line voltage (200 VAC to 240 VAC).

Step 3: Choose Additional Factory Integratable Options

One of the following from each list may be selected if desired at time of factory integration.

HPE Unique Options

| | |
|---|------------|
| HPE ProLiant ML110 Gen11 4LFF Non-hot Plug Drive Cage Kit | P53481-B21 |
|---|------------|

Notes: Add additional 4 NHP LFF drive cage, allowing for up to 8 NHP LFF SATA drive support (4+4).

| | |
|--|------------|
| HPE ProLiant ML110 Gen11 4LFF Drive Cage Kit | P53482-B21 |
|--|------------|

Notes: Add additional 4 LFF hot-plug drive cage, allowing for up to 8 LFF SAS/SATA drive support (4+4).

| | |
|--|------------|
| HPE ProLiant ML110 Gen11 8SFF Drive Cage Kit | P53483-B21 |
|--|------------|

Notes: Add additional 8 SFF hot-plug drive cage, allowing for up to 16 SFF SAS/SATA drive support (8+8).

Step 4: Choose additional options for Factory Integration from Core and Additional Options sections below



Core Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

Notes: The [User Guide \(UG\)](#) can help to explain the cable routing for each option.

Software as a Service Management

HPE GreenLake for Compute Ops Management

Base SKU

HPE GreenLake for Compute Ops Management Enhanced 3-year Upfront ProLiant SaaS R7A11AAE

Upgrade SKU

HPE GreenLake for Compute Ops Management Enhanced 1-year Upfront ProLiant SaaS R7A10AAE

HPE GreenLake for Compute Ops Management Enhanced 5-year Upfront ProLiant SaaS R7A12AAE

HPE GreenLake for Compute Ops Management Enhanced 1-year Monthly ProLiant SaaS R7A13AAE

HPE GreenLake for Compute Ops Management Enhanced 3-year Monthly ProLiant SaaS R7A14AAE

HPE GreenLake for Compute Ops Management Enhanced 5-year Monthly ProLiant SaaS R7A15AAE

HPE GreenLake for Compute Ops Management Enhanced 1-year Quarterly ProLiant SaaS R7A16AAE

HPE GreenLake for Compute Ops Management Enhanced 3-year Quarterly ProLiant SaaS R7A17AAE

HPE GreenLake for Compute Ops Management Enhanced 5-year Quarterly ProLiant SaaS R7A18AAE

HPE GreenLake for Compute Ops Management Enhanced 3-year Annual ProLiant SaaS R7A19AAE

HPE GreenLake for Compute Ops Management Enhanced 5-year Annual ProLiant SaaS R7A20AAE

HPE OneView

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU E5Y35AAE

HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU P8B26AAE

Notes: For customers purchasing HPE GreenLake for Compute Ops Management, without a hardware purchase or a BTO purchase, use this base SKU within ASQ order:

HPE GreenLake for Compute Ops Management Base SaaS R6Z73AAE

For more information, visit the HPE GreenLake for Compute Ops Management QuickSpecs:

<https://www.hpe.com/psnow/doc/a50004263enw>

Supported Servers – CTO only. No OEM. – Complete list can be found here: Latest Supported Server List:

<https://www.hpe.com/info/com-supported-servers>

HPE Unique Options

Risers

HPE ProLiant ML110 Gen11 GPU Riser Kit P53487-B21

Notes: Add this riser kit to provide additional PCIe Gen5.0 x16 slot on slot 2.

HPE ProLiant ML110 Gen11 Second GPU Riser Kit P53488-B21

Notes:

- Add this riser kit to provide additional PCIe Gen5.0 x16 slot on slot 3.
- When this Riser Kit is selected, HPE ProLiant ML110 Gen11 GPU Riser Kit (P53487-B21) is required.



Core Options

Cooling Options

HPE ProLiant ML110 Gen11 Redundant Fan Kit

P49984-B21

Notes:

When one of the following scenarios occurs, Redundant Fan Kit (P49984-B21) is required.

- Server with the following options installed:
 - o SAS 15K RPM SFF HDD.
 - o SAS4 SFF SSD drives consume power equal to or higher than 15W.
 - o HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device.
- Server is required to continue operating with single fan failure. A flashing amber Health LED will indicate this condition.
- Server is required to operate with the A3/A4 extended operating environment with ambient temperature 35°C (95°F) to 45°C (113°F).

HPE Boot Controllers

HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device

P48183-B21

Notes:

- When NS204i-u is selected, Redundant Fan Kit (P49984-B21) is required.
- System fans may operate at higher speed to maintain optimum system cooling condition while NS204i-u is installed.

HPE ProLiant ML110 Gen11 NS204i-u Enablement Kit

P61742-B21

Notes: When NS204i-u is selected, this Enablement Kit is required.

HPE Optical Drives

HPE 9.5mm SATA DVD-ROM Optical Drive

726536-B21

Notes: When this ODD selected, ODD cable Kit (P56608-B21) is required.

HPE 9.5mm SATA DVD-RW Optical Drive

726537-B21

Notes: When this ODD selected, ODD cable Kit (P56608-B21) is required.

HPE Mobile USB DVD-RW Optical Drive

701498-B21

HPE ProLiant ML110 Gen11 Optical Disk Drive Cable Kit

P57364-B21


Notes: When internal ODD selected, this ODD cable Kit is required.



Core Options

HPE Storage Controllers

Storage Controllers

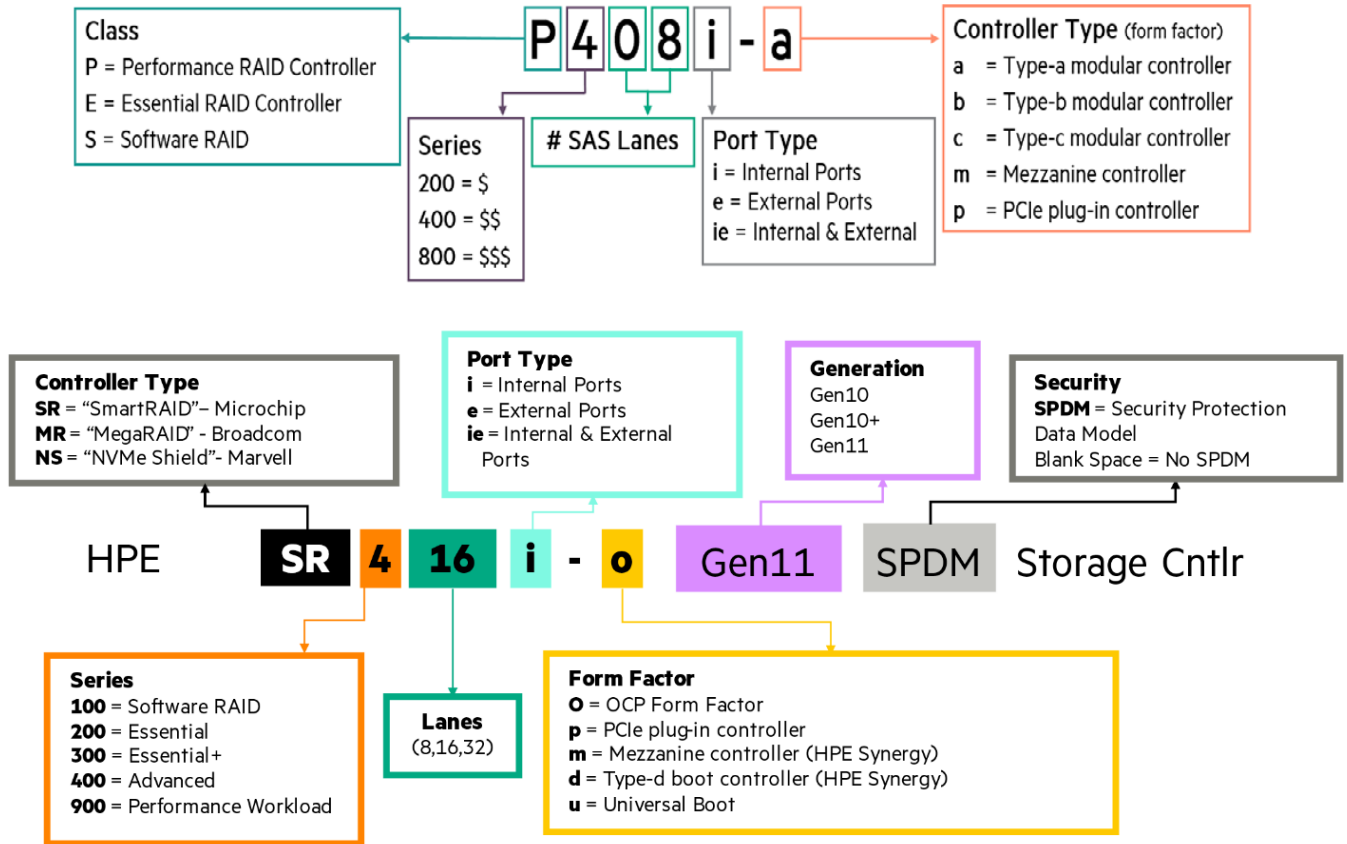

Notes:

- When selecting SR RAID controllers for external storage (E208e, 804398-B21) and MR RAID controllers for internal storage (MR216i/MR416i/MR408i) in the order, please be aware these two products use different RAID configuration tools.
- Not supporting mixing of MR (MegaRAID) series internal controllers and SR (SmartRAID) series internal Controllers
- OCP-type RAID (OROC) controller is only supported on OCP 1 slot.
- OCP 1 enablement kit is not required for listed OROC controllers below.
- For more information on the HPE Gen11 Storage Controller, please refer to: [HPE Compute MR Gen11 Controllers Quick Spec](#) and [HPE Compute SR Gen11 Controllers Quick Spec](#)

Essential RAID Controllers

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller 804398-B21

Notes: This controller supports up to 8 SAS/SATA Drives (external)
 For more information on the HPE Smart Array E208i-p SR Gen10 Controller, please refer to the [QuickSpecs](#)

Tri-mode RAID Controllers

HPE MR216i-o Gen11 x16 Lanes without Cache OCP SPDM Storage Controller P47789-B21

- Notes:**
- Does not occupy a PCIe expansion slot.
 - This controller supports up to 16 SAS/SATA/NVMe Drives with RAID 0/1/10.



Core Options

HPE MR216i-p Gen11 x16 Lanes without Cache PCI SPDM Plug-in Storage Controller P47785-B21

Notes: This controller supports up to 16 SAS/SATA/NVMe Drives with RAID 0/1/10.

HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller P58335-B21

Notes:

- Does not occupy a PCIe expansion slot.
- This controller supports up to 8 SAS/SATA/NVMe Drives
- HPE 96W Smart Storage Battery 260mm Cbl (P01367-B21) OR HPE Smart Hybrid Capacitor w/ 260mm Cbl (P02381-B21) must be selected with this controller.

HPE MR416i-o Gen11 x16 Lanes 8GB Cache OCP SPDM Storage Controller P47781-B21

Notes:

- Does not occupy a PCIe expansion slot.
- This controller supports up to 16 SAS/SATA/NVMe Drives
- HPE 96W Smart Storage Battery 260mm Cbl (P01367-B21) OR HPE Smart Hybrid Capacitor w/ 260mm Cbl (P02381-B21) must be selected with this controller.

HPE MR416i-p Gen11 x16 Lanes 8GB Cache PCI SPDM Plug-in Storage Controller P47777-B21

Notes:

- This controller supports up to 16 SAS/SATA/NVMe Drives
- HPE 96W Smart Storage Battery 260mm Cbl (P01367-B21) OR HPE Smart Hybrid Capacitor w/ 260mm Cbl (P02381-B21) must be selected with this controller.

Controller Battery Cable Kits

HPE 96W Smart Storage Lithium-ion Battery with 260mm Cable Kit P01367-B21

HPE Smart Storage Hybrid Capacitor with 260mm Cable Kit P02381-B21

Notes: The two 260mm cable kit can't be selected together.

Software RAID

Intel Virtual RAID on CPU Standard FIO Software for HPE SOE37A

Notes:

- Requires UEFI, not supported on Legacy Mode.
- For NVMe SSDs only, no PCIe card support.
- Supports RAID 0/1/10
- ML110 Gen11 supports up to 2x M.2 NVMe drives on onboard slots with Intel Virtual RAID on CPU Standard for RAID 0/1/10 (SOE37A/SOE38AAE).

Intel Virtual RAID on CPU Standard E-RTU for HPE SOE38AAE

Notes:

- Requires UEFI, not supported on Legacy Mode.
- For NVMe SSDs only, no PCIe card support.
- Supports RAID 0/1/10
- Similar to Intel Virtual RAID on CPU Standard FIO Software for HPE (SOE37A), but intended for field deployments (BTO).
- ML110 Gen11 supports up to 2x M.2 NVMe drives on onboard slots with Intel Virtual RAID on CPU Standard for RAID 0/1/10 (SOE37A/SOE38AAE).



Core Options

HPE Drives

HPE Hard Disk Drives

Notes Mission Critical - 12G SAS - SFF Drives

| | SKU |
|---|------------|
| 1 HPE 300GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD | P28028-B21 |
| 1 HPE 300GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD | P40430-B21 |
| 1 HPE 600GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD | P53560-B21 |
| HPE 600GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD | P53561-B21 |
| 1 HPE 900GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD | P40432-B21 |
| HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD | P28586-B21 |
| HPE 1.8TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD | P53562-B21 |
| HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD | P28352-B21 |

Business Critical - 12G SAS - SFF Drives

| | |
|--|------------|
| HPE 1TB SAS 12G Business Critical 7.2K SFF BC 1-year Warranty HDD | P53563-B21 |
| HPE 2TB SAS 12G Business Critical 7.2K SFF BC 1-year Warranty 512e HDD | P28505-B21 |

Business Critical - 12G SAS - LFF Drives

| | |
|---|------------|
| HPE 2TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD | 833926-B21 |
| HPE 4TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD | 833928-B21 |
| HPE 6TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD | 861746-B21 |
| HPE 8TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD | 834031-B21 |
| HPE 10TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e ISE Multi Vendor HDD | P53556-B21 |
| HPE 12TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD | 881781-B21 |
| HPE 14TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD | P09155-B21 |
| HPE 16TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD | P23608-B21 |
| HPE 18TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD | P37669-B21 |
| HPE 20TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD | P53553-B21 |

Business Critical - 6G SATA - SFF Drives

| | |
|--|------------|
| HPE 1TB SATA 6G Business Critical 7.2K SFF BC 1-year Warranty HDD | P28610-B21 |
| HPE 2TB SATA 6G Business Critical 7.2K SFF BC 1-year Warranty 512e HDD | P28500-B21 |

Business Critical - 6G SATA - LFF Drives

| | |
|---|------------|
| HPE 1TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD | 861686-B21 |
| HPE 1TB SATA 6G Business Critical 7.2K LFF RW 1-year Warranty Multi Vendor HDD | 801882-B21 |
| HPE 2TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD | 861681-B21 |
| HPE 4TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD | 861683-B21 |
| HPE 4TB SATA 6G Business Critical 7.2K LFF RW 1-year Warranty Multi Vendor HDD | 801888-B21 |
| HPE 6TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD | 861742-B21 |
| HPE 8TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD | 834028-B21 |
| HPE 10TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e ISE Multi Vendor HDD | P53557-B21 |
| HPE 12TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD | 881787-B21 |
| HPE 14TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD | P09165-B21 |
| HPE 16TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD | P23449-B21 |
| HPE 18TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD | P37678-B21 |
| HPE 20TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD | P53554-B21 |

Mission Critical - 12G SAS - SFF SED (Self-Encryption Drive)

| | |
|---|------------|
| HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Self-encrypting FIPS HDD | P28622-B21 |
| HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Self-encrypting FIPS HDD | P28618-B21 |



Core Options

SSD Selection

For SSD selection guidance, please visit <https://ssd.hpe.com/>

Notes Read Intensive - 12G/24G SAS - SFF - Solid State Drives

| | |
|---|------------|
| HPE 960GB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD | P40506-B21 |
| HPE 1.92TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD | P40507-B21 |
| HPE 3.84TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD | P40508-B21 |
| HPE 7.68TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD | P40509-B21 |
| HPE 960GB SAS 24G Read Intensive SFF BC Multi Vendor SSD | P49029-B21 |
| HPE 1.92TB SAS 24G Read Intensive SFF BC Multi Vendor SSD | P49031-B21 |
| 2 HPE 3.84TB SAS 24G Read Intensive SFF BC Multi Vendor SSD | P49035-B21 |
| 2 HPE 7.68TB SAS 24G Read Intensive SFF BC Multi Vendor SSD | P49041-B21 |
| 2 HPE 15.36TB SAS 24G Read Intensive SFF BC Multi Vendor SSD | P49045-B21 |

Mixed Use - 12G/24G SAS - SFF - Solid State Drives

| | |
|--|------------|
| HPE 960GB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD | P40510-B21 |
| HPE 1.92TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD | P40511-B21 |
| HPE 3.84TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD | P40512-B21 |
| HPE 800GB SAS 24G Mixed Use SFF BC Multi Vendor SSD | P49047-B21 |
| HPE 1.6TB SAS 24G Mixed Use SFF BC Multi Vendor SSD | P49049-B21 |
| 2 HPE 3.2TB SAS 24G Mixed Use SFF BC Multi Vendor SSD | P49053-B21 |
| 2 HPE 6.4TB SAS 24G Mixed Use SFF BC Multi Vendor SSD | P49057-B21 |

Read Intensive - 12G/24G SAS - SFF - SED (Self-Encryption Drive) Solid State Drives

| | |
|---|------------|
| HPE 3.84TB SAS 24G Read Intensive SFF BC Self-encrypting FIPS PM6 SSD | P41398-B21 |
| 2 HPE 7.68TB SAS 24G Read Intensive SFF BC Self-encrypting FIPS PM6 SSD | P41399-B21 |

Mixed Use - 12G/24G SAS - SFF - SED (Self-Encryption Drive) Solid State Drives

| | |
|---|------------|
| HPE 800GB SAS 24G Mixed Use SFF BC Self-encrypting FIPS PM6 SSD | P41400-B21 |
| HPE 1.6TB SAS 24G Mixed Use SFF BC Self-encrypting FIPS PM6 SSD | P41401-B21 |

Read Intensive - 12G/24G SAS - LFF- Solid State Drives

| | |
|--|------------|
| HPE 7.68TB SAS 24G Read Intensive LFF LPC Multi Vendor SSD | P49040-B21 |
|--|------------|

Mixed Use -12G/24G SAS - LFF- Solid State Drives

| | |
|--|------------|
| HPE 960GB SAS 12G Mixed Use LFF LPC Value SAS Multi Vendor SSD | P37009-B21 |
|--|------------|

Mixed Use - 6G SATA - SFF - Solid State Drives

| | |
|---|------------|
| HPE 480GB SATA 6G Mixed Use SFF BC S4620 SSD | P47324-B21 |
| HPE 3.84TB SATA 6G Mixed Use SFF BC S4620 SSD | P47327-B21 |
| HPE 480GB SATA 6G Mixed Use SFF BC Multi Vendor SSD | P40502-B21 |
| HPE 960GB SATA 6G Mixed Use SFF BC Multi Vendor SSD | P40503-B21 |
| HPE 1.92TB SATA 6G Mixed Use SFF BC Multi Vendor SSD | P40504-B21 |
| HPE 3.84TB SATA 6G Mixed Use SFF BC Multi Vendor SSD | P40505-B21 |
| HPE 480GB SATA 6G Mixed Use SFF BC PM897 SSD | P44011-B21 |
| HPE 960GB SATA 6G Mixed Use SFF BC PM897 SSD | P44012-B21 |
| HPE 1.92TB SATA 6G Mixed Use SFF BC PM897 SSD | P44013-B21 |
| HPE 1.92TB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD | P58248-B21 |

Read Intensive - 6G SATA - SFF - Solid State Drives

| | |
|--|------------|
| HPE 1.92TB SATA 6G Read Intensive SFF BC S4520 SSD | P47320-B21 |
| HPE 3.84TB SATA 6G Read Intensive SFF BC S4520 SSD | P47322-B21 |
| HPE 240GB SATA 6G Read Intensive SFF BC Multi Vendor SSD | P40496-B21 |
| HPE 480GB SATA 6G Read Intensive SFF BC Multi Vendor SSD | P40497-B21 |
| HPE 960GB SATA 6G Read Intensive SFF BC Multi Vendor SSD | P40498-B21 |

Core Options

| | |
|---|------------|
| HPE 1.92TB SATA 6G Read Intensive SFF BC Multi Vendor SSD | P40499-B21 |
| HPE 3.84TB SATA 6G Read Intensive SFF BC Multi Vendor SSD | P40500-B21 |
| HPE 7.68TB SATA 6G Read Intensive SFF BC Multi Vendor SSD | P40501-B21 |
| HPE 480GB SATA 6G Read Intensive SFF BC PM893 SSD | P44007-B21 |
| HPE 960GB SATA 6G Read Intensive SFF BC PM893 SSD | P44008-B21 |
| HPE 1.92TB SATA 6G Read Intensive SFF BC PM893 SSD | P44009-B21 |
| HPE 3.84TB SATA 6G Read Intensive SFF BC PM893 SSD | P44010-B21 |
| HPE 1.92TB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD | P58240-B21 |
| Very Read Optimized – 6G SATA - SFF – Solid State Drives | |
| HPE 7.68TB SATA 6G Very Read Optimized SFF BC 5400 SSD | P58228-B21 |
| Read Intensive – 6G SATA - LFF – Solid State Drives | |
| HPE 960GB SATA 6G Read Intensive LFF LPC Multi Vendor SSD | P47808-B21 |
| Very Read Optimized – 6G SATA - LFF – Solid State Drives | |
| HPE 7.68TB SATA 6G Very Read Optimized LFF LPC 5400 SSD | P58232-B21 |
| Read Intensive - SATA – M.2 - Solid State Drives | |
| 3 HPE 240GB SATA 6G Read Intensive M.2 Multi Vendor SSD | P47817-B21 |
| 3 HPE 480GB SATA 6G Read Intensive M.2 Multi Vendor SSD | P47818-B21 |
| Read Intensive - NVMe – M.2 - Solid State Drives | |
| 3 HPE 480GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD | P40513-B21 |
| 3 HPE 960GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD | P40514-B21 |
| 3 HPE 1.92TB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD | P40515-B21 |

Notes:

- ¹² Redundant Fan Kit (P49984-B21) is required for SAS 15K RPM SFF HDD and SAS4 SFF SSD drives consume power equal to or higher than 15W.
- ² Support limited to 25°C maximum inlet temperature for SAS4 SFF SSD drives consume power equal to or higher than 15W with Redundant Fan Kit (P49984-B21).
- ³ Mixing of SATA M.2 and NVMe M.2 SSDs is not allowed.

HPE Networking

Notes:

- High performance networking cards equal or greater than 100Gb that may cause the fans to operate at higher speeds to maintain optimum system cooling when system at idle status.
- Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information: <https://h20195.www2.hpe.com/v2/getpdf.aspx/A00002507ENW>.

PCIe Adapters

1 Gigabit Ethernet adapters

| | |
|---|------------|
| Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T Adapter for HPE | P51178-B21 |
| Intel I350-T4 Ethernet 1Gb 4-port BASE-T Adapter for HPE | P21106-B21 |

10 Gigabit Ethernet adapters

| | |
|---|------------|
| Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE | P26253-B21 |
| Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE | P26259-B21 |

10/25 Gigabit Ethernet adapters

| | |
|---|------------|
| Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | P26262-B21 |
| Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | P08443-B21 |



Core Options

| | |
|--|------------|
| Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | P42044-B21 |
| Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE | P08458-B21 |
| 100 Gigabit Ethernet adapters | |
| Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE | P21112-B21 |
| OCP Adapter | |
| 1 Gigabit Ethernet OCP adapters | |
| Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE | P51181-B21 |
| Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE | P08449-B21 |
| 10 Gigabit Ethernet OCP Adapters | |
| Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE | P26256-B21 |
| Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE | P10097-B21 |
| 10/25 Gigabit Ethernet OCP adapters | |
| Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE | P10106-B21 |
| Mellanox MCX631432AS-ADA1 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE | P42041-B21 |
| Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE | P10115-B21 |
| Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE | P26269-B21 |
| 100 Gigabit Ethernet adapters | |
| Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 OCP3 Adapter for HPE | P22767-B21 |

HPE Power Supplies

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

Notes:

- Prior to making a power supply selection it is highly recommended that the [HPE Power Advisor Tool](#) is run to determine the right size power supply for your server configuration.
- Visit [HPE Power Cords and Cables](#) for a full list of optional power cords.
- Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.
- Flex Slot Titanium power supplies support power efficiency of up to 96% and include a standard C-14 power inlet connector.

| | |
|--|------------|
| HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | 865408-B21 |
| HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | P38995-B21 |
| HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit | P03178-B21 |
| HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | P38997-B21 |

Notes: Only supports high line voltage (200 VAC to 240 VAC).



Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

Embedded Management

HPE iLO Advanced

| | |
|--|------------|
| HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features | E6U59ABE |
| HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features | E6U64ABE |
| HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features | BD505A |
| HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features | BD506A |
| HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features | BD507A |
| HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features | 512485-B21 |
| HPE iLO Advanced Flexible Quantity License with 1yr Support on iLO Licensed Features | 512486-B21 |
| HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features | 512487-B21 |

HPE iLO Common Password Setting

| | |
|-------------------------------------|------------|
| HPE iLO Common Password FIO Setting | P08040-B21 |
|-------------------------------------|------------|

Notes:

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory
- Express Integration Services.

HPE Security

| | |
|--|------------|
| HPE ProLiant ML350/ML110 Gen11 Intrusion Cable Kit | P47226-B21 |
|--|------------|

HPE Cable Options

| | |
|---|------------|
| HPE ProLiant ML110 Gen11 LFF PCIe Cable Kit | P53484-B21 |
|---|------------|

Notes: Select this cable kit to support p-type RAID controller with LFF drive cage.

| | |
|---|------------|
| HPE ProLiant ML110 Gen11 SFF OROC Cable Kit | P53485-B21 |
|---|------------|

Notes: Select this cable kit to support embedded or OCP-type (OROC) controller with SFF drive cage.

| | |
|---|------------|
| HPE ProLiant ML110 Gen11 SFF PCIe Cable Kit | P55859-B21 |
|---|------------|

Notes: Select this cable kit to support p-type RAID controller with SFF drive cage.

| | |
|--|------------|
| HPE ProLiant ML110 Gen11 Serial Port Cable Kit | P53489-B21 |
|--|------------|

HPE Tape Backup

For the complete range of tape drives, autoloaders, libraries and media see:

<https://www.hpe.com/us/en/storage/storeever-tape-storage.html>.

For hardware and software compatibility of Hewlett Packard Enterprise tape backup products

<http://www.hpe.com/storage/BURACompatibility>.

Notes:

- When internal RDX docking station ordered, HPE ProLiant ML110 Gen11 RDX Cable Kit (P53491-B21) is required.
- Support one internal RDX installation in Media bay.
- Change the Thermal Configuration to Increased Cooling mode in BIOS/Platform Configuration (RBSU) menu when internal RDX is installed.



Additional Options

HPE Tape Drives

| | |
|---|--------|
| HPE StoreEver LTO-8 Ultrium 30750 External Tape Drive | BC023A |
| HPE StoreEver LTO-9 Ultrium 45000 External Tape Drive | BC042A |
| HPE StoreEver LTO-7 Ultrium 15000 External Tape Drive | BB874A |

HPE Tape Drives Cartridge

| | |
|--|--------|
| HPE LTO-6 Ultrium 6.25TB RW Data Cartridge | C7976A |
| HPE LTO-7 Ultrium 15TB RW Data Cartridge | C7977A |
| HPE LTO-8 Ultrium 30TB RW Data Cartridge | Q2078A |
| HPE LTO-9 Ultrium 45TB RW Data Cartridge | Q2079A |

HPE Tape Backup Products

| | |
|---|--------|
| HPE StoreEver Mini-SAS High Density to 4-lane Mini-SAS External Fanout 2m Cable | K2R09A |
| HPE StoreEver Mini-SAS High Density to 4-lane Mini-SAS External Fanout 4m Cable | K2R10A |

HPE RDX Products

| | |
|--|--------|
| HPE RDX External Docking Station | C8S07B |
| HPE RDX Internal Docking Station | C8S06A |
| HPE RDX 4TB Removable Disk Cartridge | Q2048A |
| HPE RDX 2TB Removable Disk Cartridge | Q2046A |
| HPE RDX 1TB Removable Disk Cartridge | Q2044A |
| HPE RDX 500GB Removable Disk Cartridge | Q2042A |

Internal RDX Support Kit

| | |
|--|------------|
| HPE ProLiant ML110 Gen11 RDX Cable Kit | P53491-B21 |
|--|------------|

Notes: [Supporting cables to add additional internal RDX device for data backup or archiving.](#)

HPE Storage Options

Emulex Fibre Channel HBAs

| | |
|---|--------|
| HPE SN1600E 32Gb Single Port Fibre Channel Host Bus Adapter | Q0L11A |
| HPE SN1600E 32Gb Dual Port Fibre Channel Host Bus Adapter | Q0L12A |
| HPE SN1610E 32Gb 1-port Fibre Channel Host Bus Adapter | R2J62A |
| HPE SN1610E 32Gb 2-port Fibre Channel Host Bus Adapter | R2J63A |

QLogic Fibre Channel HBAs

| | |
|---|--------|
| HPE SN1600Q 32Gb Single Port Fibre Channel Host Bus Adapter | P9M75A |
| HPE SN1600Q 32Gb Dual Port Fibre Channel Host Bus Adapter | P9M76A |
| HPE SN1610Q 32Gb 1-port Fibre Channel Host Bus Adapter | R2E08A |
| HPE SN1610Q 32Gb 2-port Fibre Channel Host Bus Adapter | R2E09A |

HPE Racks

- Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
- Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
- Please see the [HPE Standard Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.



Additional Options

HPE Power Distribution Units (PDUs)

- Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

HPE Uninterruptible Power Systems (UPS)

- To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).
- Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.

| | |
|--|--------|
| HPE T750 Gen5 NA/JP UPS with Management Card Slot | Q1F47A |
| HPE T750 Gen5 INTL UPS with Management Card Slot | Q1F48A |
| HPE T1000 Gen5 NA/JP UPS with Management Card Slot | Q1F49A |
| HPE T1000 Gen5 INTL UPS with Management Card Slot | Q1F50A |
| HPE T1500 Gen5 NA/JP UPS with Management Card Slot | Q1F51A |
| HPE T1500 Gen5 INTL UPS with Management Card Slot | Q1F52A |

HPE Rack Options

Please see the [HPE KVM Switches web page](#) for information on these products and their specifications.

Rail Kits


HPE ProLiant ML350/ML110 Gen11 T/R Conversion Kit P47394-B21

Notes: Easy install rack rail tray which takes up 1U height in a standard rack facility. This kit is supported in both ML350 and ML110 Gen11 for tower to rack conversion. This kit includes CMA and is shipped as standard.



Memory

Memory Population guidelines

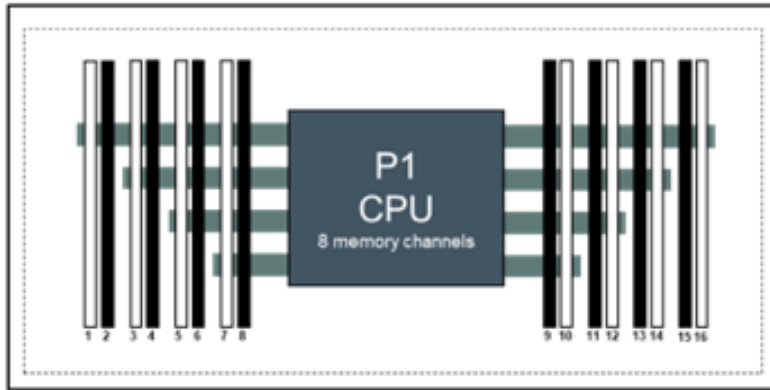

HPE ML110 Gen11 Server (Front of server)

Notes: 2 Slots per channel

HPE ProLiant ML110 Gen11 Servers 16 slots per CPU DIMM population order

| | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|--|----|----|----|----|--|--|----|
| 1 DIMM | | | | | | | | | | 10 | | | | | | | | | | | | | | |
| 2 DIMMs² | | | 3 | | | | | | | | 10 | | | | | | | | | | | | | |
| 4 DIMMs² | | | 3 | | | | 7 | | | | | 10 | | | 14 | | | | | | | | | |
| 6 DIMMs | | | 3 | | | 5 | | | 7 | | | | 10 | | | 14 | | | 16 | | | | | |
| 8 DIMMs^{1,2} | 1 | | | 3 | | | 5 | | | 7 | | | | | 10 | | | 12 | | | 14 | | | 16 |
| 12 DIMMs | 1 | 2 | 3 | | | | 5 | 6 | 7 | | | | | 10 | 11 | 12 | | | 14 | 15 | 16 | | | |
| 16 DIMMs^{1,2} | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | | | | | | | | |

Notes:

- ¹ Support SGX (Software Guard Extensions)
- ² Support Hemi (hemisphere mode)

General Memory Population Rules and Guidelines:

- Install DIMMs only if the corresponding processor is installed. If only one processor is installed in a 2-processor system, only half of the DIMM slots are available to populate.
- If a memory channel consists of more than one DIMM slot, the white DIMM slot is located furthest from the CPU. White DIMM slots denote the first slot to be populated in a channel. For one DIMM per channel (DPC), populate white DIMM slots only
- Rank mixing is not allowed on a channel except for 1 rank + 2 rank combination when all 16 DIMMs for a Processor socket is populated. (2 rank in white slot, 1 rank in block slot),
- No x4 mixing with x8 across a socket.
- If multiple CPUs are populated, split the HPE Smart Memory DIMMs evenly across the CPUs and follow the corresponding CPU rules when populating DIMMs.
- To maximize performance, it is recommended to balance the total memory capacity across all installed processors and load the channels similarly whenever possible.
- If the number of DIMMs does not spread evenly across the CPUs, populate as close to evenly as possible.
- Avoid creating an unbalanced configuration for any CPU.



Memory

- The maximum memory capacity is a function of the number of DIMM slots on the platform—the largest DIMM capacity qualified on the platform and the number and model of qualified processors installed on the platform.
- Do not mix HPE Smart Memory RDIMMs and HPE Smart Memory LRDIMMs in the same system.
- Rank mixing is not allowed on a channel except for 1 rank + 2 rank combination (2 rank in white slot, 1 rank in block slot), when all 16 DIMMs for a Processor socket is populated.
- The 256 GB 8R 3DS RDIMM can be mixed with 128 GB 4R 3DS RDIMM ONLY in 16 DIMMs populated. 256 GB 8R 3DS RDIMM needs to be in white slot while 128 GB 4R 3DS RDIMM needs to be in black slot.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- DIMMs of different speeds may be mixed in any order; however, the server will select the lowest common speed among all of the DIMMs on all of the CPUs.
- HPE Smart Memory DIMMs and HPE NVDIMM-Ns from previous generation servers are not compatible with the current generation. Certain HPE Smart Memory features such as memory authentication and enhanced performance may not be supported.
- There are no performance implications for mixing sets of different capacity DIMMs at the same operating speed. For example, latency and throughput will not be negatively impacted by installing an equal number of 32 GB 1rank x4 DDR5-4800 DIMMs (in block slot) and 64 GB 2rank x4 DDR5-4800 DIMMs (in white slot).
- Take each DIMM type and create a configuration as if it were a homogeneous configuration.
- For details on the HPE Server Memory Options Population Rules, visit: <http://www.hpe.com/docs/memory-population-rules>.
- For additional information, please see the [HPE DDR5 Smart Memory QuickSpecs](#).

Notes: The maximum memory speed is a function of the memory type, memory configuration, and processor model.

For details on the HPE Server Memory speed, visit: <https://www.hpe.com/docs/memory-speed-table>




Storage

**8 NHP LFF drive model**

Tower – shown with tower feet.

- 2 x 4LFF NHP SATA Drive Cage Kit in Box 1/2.
- Internal RDX Docking station.

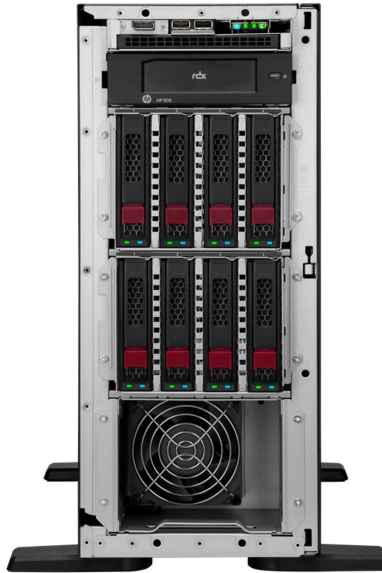**8 LFF hot-plug drive model**

Tower – shown with tower feet.

- 2 x 4LFF SAS/SATA hot-pluggable Drive Cage Kit in Box 1/2.
- Internal RDX Docking station.

**16 SFF hot-plug drive model**

Tower – shown with tower feet.

- 2 x 8SFF SAS/SATA hot-pluggable Drive Cage Kit in Box 1/2.
- Internal RDX Docking station.



Technical Specifications

System Unit

Dimensions

- **Tower**
46.2 (H) x 58.7 (D) x 19.5 (W) cm
18.19 (H) x 23.1 (D) x 7.68 (W) in
- **Rack – System only**
19.5 (H/4.5U) x 58.7 (D) x 44.5 (W) cm
7.68 (H) x 23.1 (D) x 17.5 (W) in
- **Tower-to-Rack Conversion Kit (1U)**
4.445 (H/1U) x 69.2 (D/without CMA. Depth with CMA: 83.5) x 45.2 (W) cm
1.75 (H/1U) x 27.23 (D/without CMA. Depth with CMA: 32.89) x 17.795 (W) in

Weight (approximate)

- **20.1 kg (44.31 lb)**
SFF Minimum:
1x 8SFF cage with 1x SFF HDD and 7x SFF HDD blanks, 1x Drive Cage blank, 1x Media Bay blanks, 1x DVD bay blank, 1x processor including standard heatsink, 1x DIMM, 1x power supply (plus blank), 1x x8 HHHL card(Max. 166g), 1x OCP blanks, 1x GPU Riser Cage blank, Cables for the above.
- **30.3 kg (66.8 lb)**
SFF Maximum:
16x SFF HDDs with 2x SFF Drive cages, 1x DVD device, 1x processor including standard heatsink, 16x DIMMs, 2x power supply, 1x GPU riser cage, 1x Megacell, 1x OCP, 2x Single Width x16 GPU card, 2x x8 HHHL card (Max. 166g), Cables for the above.
- **20.4 kg (44.97 lb)**
LFF Minimum:
1x 4LFF cage with 1x LFF HDD and 3x HDD blanks, 1x Drive Cage blank, 1x Media Bay blanks, 1x DVD bay blank, 1x processor including standard heatsink, 1x DIMM, 1x power supply (plus blank), 1x x8 HHHL card (Max. 166g), 1x Megacell, 1x OCP blanks, 1x GPU Riser Cage blank, Cables for the above.
- **33.2 kg (73.19 lb)**
LFF Maximum:
8x LFF HDDs with 2x LFF Drive Cage, 1x DVD device, 1x processor including standard heatsink, 16x DIMMs, 2x power supply, 1x GPU Riser Cage, 1x Megacell, 1x OCP, 2x Single Width x16 GPU card, 2x x8 HHHL card(Max. 166g), 1x NS204i-u, Cables for the above.

Input Requirements (per power supply)

Rated Line Voltage

- 100 to 120 VAC
- 200 to 240 VAC

BTU Rating

Maximum

- For 500W Power Supply: 1902 BTU/hr (at 100 VAC), 1840 BTU/hr (at 200 VAC), 1832 BTU/hr (at 240 VAC)
 - For 800W Power Supply: 3067 BTU/hr (at 100 VAC), 2958 BTU/hr (at 200 VAC), 2949 BTU/hr (at 240 VAC)
 - For 1000W Power Supply: 3741 BTU/hr (at 100 VAC), 3596 BTU/hr (at 200 VAC), 3582 BTU/hr (at 240 VAC)
 - For 1600W Power Supply: 5918 BTU/hr (at 200 VAC), 5884 BTU/hr (at 240 VAC)
-



Technical Specifications

Power Supply Output (per power supply)

Rated Steady-State Power

- For 1600W (Titanium) Power Supply: 1600W (at 240 VAC), 1600W (at 240 VDC) for China only
- For 1000W (Titanium) Power Supply: 1000W (at 100 VAC), 1000W (at 240 VAC)
- For 800W (Platinum) Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VDC) input for China only
- For 500W (Platinum) Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VDC) input for China only

Maximum Peak Power

- For 1600W (Titanium) Power Supply: 1600W (at 240 VAC), 1600W (at 240 VDC) for China only
 - For 1000W (Titanium) Power Supply: 1000W (at 100 VAC), 1000W (at 240 VAC)
 - For 800W (Platinum) Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VDC) input for China only
 - For 500W (Platinum) Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VDC) input for China only
-

System Inlet Temperature

- **Standard Operating Temperature**

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

- **Extended Ambient Operating Temperature**

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <https://www.hpe.com/support/ASHRAEGen11>

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <https://www.hpe.com/support/ASHRAEGen11>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

- **Non-operating**

-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).

Relative Humidity (non-condensing)

- **Operating**

8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.

- **Non-operating**

5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

Altitude

- **Operating**

3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

- **Non-operating**

9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).



Technical Specifications

Emission Classification (EMC) Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

https://support.hpe.com/hpsc/public/docDisplay?docLocale=en_US&docId=c03471072

Environment-friendly Products and Approach End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Acoustic Noise

Listed are the declared mean A-Weighted sound power levels (LwAm), declared average bystander position A-Weighted sound pressure levels (LpAm) and the statistical adder for verification, Kv, is a quantity to be added to the declared mean A-weighted sound power

level, LwA,m when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

| Test Case | Entry LFF Model | Entry LFF Model | Base SFF Model | Performance SFF Model | Performance 2 SFF Model |
|------------------|-----------------|-----------------|----------------|-----------------------|-------------------------|
| Idle | | | | | |
| LwA,m | 3.7 B | 3.7 B | 3.7 B | 3.7 B | 3.7 B |
| LpAm | 22 dBA | 22 dBA | 22 dBA | 22 dBA | 22 dBA |
| Kv | 0.4 B | 0.4 B | 0.4 B | 0.4 B | 0.4 B |
| Operating | | | | | |
| LwA,m | 4.2 B | 4.2 B | 4.3 B | 4.0 B | 5.1 B |
| LpAm | 28 dBA | 28 dBA | 28 dBA | 25 dBA | 33 dBA |
| Kv | 0.4 B | 0.4 B | 0.4 B | 0.4 B | 0.4 B |

Notes:

- The declared mean A-weighted sound power level, LWA,m, is computed as the arithmetic average of the measured.
- A-weighted sound power levels for a randomly selected sample, rounded to the nearest 0,1 B.
- The declared mean A-weighted emission sound pressure level, LpA,m, is computed as the arithmetic average of the measured A-weighted emission sound pressure levels at the bystander positions for a randomly selected sample, rounded to the nearest 1 dB.
- The statistical adder for verification, Kv, is a quantity to be added to the declared mean A-weighted sound power level, LWA,m, such that there will be a 95 % probability of acceptance, when using the verification procedures of ISO 9296, if no more than 6,5 % of the batch of new equipment, has A-weighted sound power levels greater than (LWA,m + Kv).
- The quantity, LWA,c (formerly called LwA,m), can be computed from the sum of LWA,m and Kv.
- All measurements made to conform to ISO 7779 / ECMA-74 and declared to conform to ISO 9296 / ECMA-109.
- B, dB, abbreviations for bels and decibels, respectively, where 1 B = 10 dB.
- The results in this declaration apply only to the model numbers listed above when operating and tested according to the indicated modes and standards. A system with additional configuration components or increased operating functionality may increase the noise emission values.
- System under abnormal conditions may increase the noise level, persons in the vicinity of the product [cabinet] for extended periods of time should consider wearing hearing protection or using other means to reduce noise exposure.


Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|------------------------|---------------|--|
| 05-Jun-2023 | Version 2 | Changed | Pre-Configured Models, Configuration Information and Core Options sections were updated. |
| 01-May-2023 | Version 1 | New | New QuickSpecs. |



Copyright

**Make the right purchase decision.
Contact our presales specialists.**

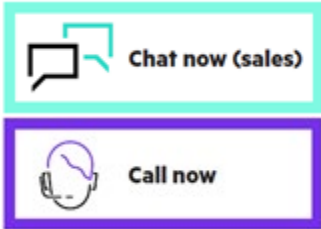

© Copyright 2023 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries. Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a00054055enw - 16305 - Worldwide - V2 - 05-June-2023